

Note:

1.All dimensions are in millimeters.

2.General tolerance:±0.2mm.

3.Material:

Base:UL94V-0 PBT Thermoplastic(Black).

Cover:UL94V-0 PBT Thermoplastic(Black/Red/Blue).

Actuators:UL94V-0 PBT Thermoplastic(White).

Contact plating:Gold plating over nickel.

Pitting material:Epoxy.

4. Electrical

Electrical:2000 Operations per switch 24/VDC, 25mA.

Non-Swithing Rating:100mA, 50/VDC.

Swithing Rating:25mA, 24/VDC

Contact Resistance:100 mΩ Max.at initial.

5. Mechanical

Mechanical life:2000 Operations per switch.

Stroke:2.0mm.

Operation Temp:-20℃ to 70℃.

Storage Temp:-40℃ to 85℃.

6. PART NUMBER DESCRIPTION:

DS DA 10 L H G E T R

[Color of Cover:R=Red B=Blue K=Black]

[Packing:T=Tube R=Reel]




[Finish:E=1 μ"-3 μ" Gold-plated]

[Finish: G=Full Gold S=Contat-Gold-plated, Terminal-Tin-Plated]

[Terminal:S=SMD type H=Straight.....]

[Actuator:T=Tape sealed S=Low profile W/O Tape L=Extension]

[HP=Half-Pitch IC=IC type type WB=WB type]

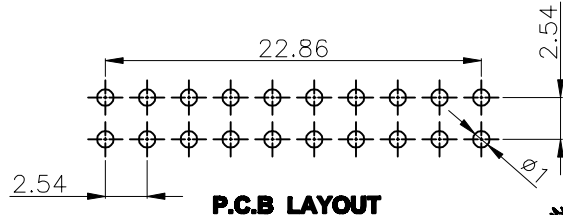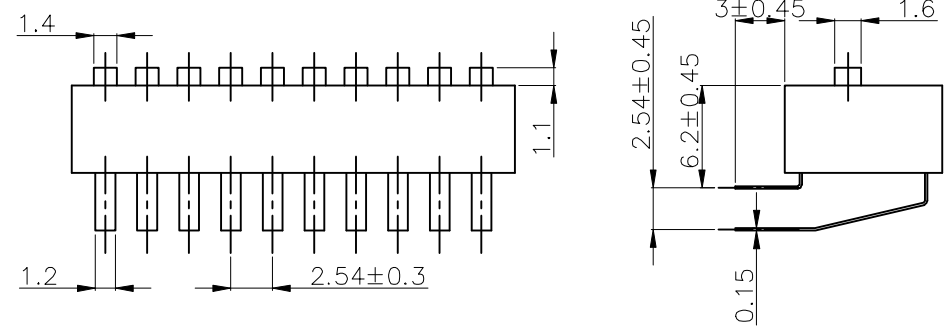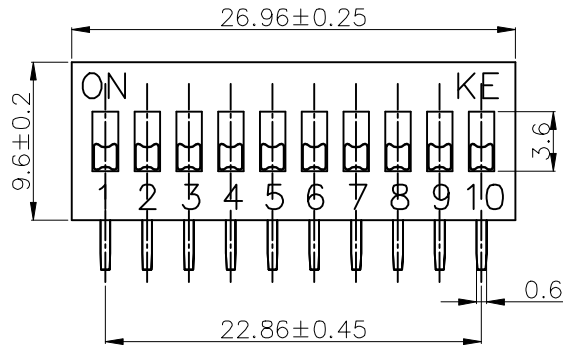

注意:

1.波峰焊: 推荐焊锡温度在270℃±5℃, 浸锡时间为5~6秒钟。

2.手工焊: 使用30瓦烙铁控制温度在320℃, 焊接时间大约2~3秒钟。

3.拨柄位置: 产品焊接时, 请将产品的拨柄置于OFF端, 能给予产品更好的接触性能。

4.清洗过程: 清洗使用超声波方式, 能给予更好的效果。

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	KE 东莞市广普实业有限公司 DongGuan Kingtek Industrial Co., Ltd. TITLE BY DSDA SERIES PITCH 2.54mm PRODUCT FAMILY DSDA SERIES PRAT NO. DSDA10LHGETR FILE NO. DSDA10LHGETR-A SIZE UNIT SCALE SHEET REV. A4mmFIT1OF1A
LINER	ANGLES	PROJECTION	
.0 ± 0.40	0. ± 1°		
.00 ± 0.30	.0 ± 0.5°		
.000± 0.20	.00±		
DESIGN	LU ER XIN	2013/01/02	
DRAWING			
CHECK			
APPD.			