

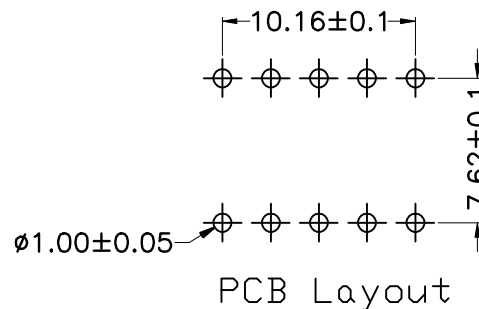
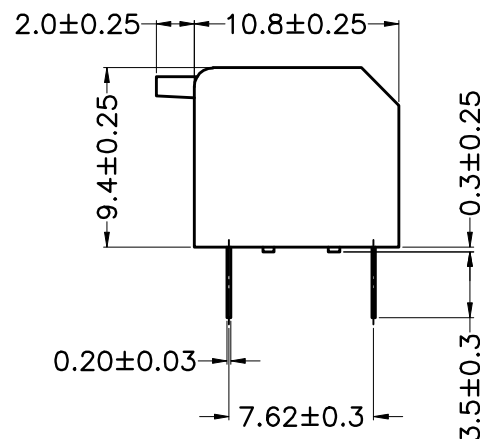
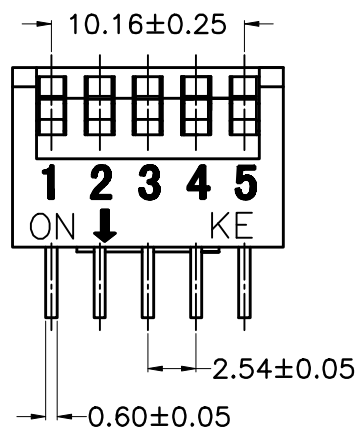



PRODUCT NO.	1
DSDP05LHGET	RoHS compliant

REV.	ECN NO.	DR	DATE	6



Note:

1. All dimensions are in millimeters.

2. General tolerance: $\pm 0.2\text{mm}$.

3. Material:

Base: UL94V-0 PBT Thermoplastic (Black).

Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).

Actuators: UL94V-0 PA66 Thermoplastic (White).

Contact plating: Gold plating over nickel.

Pitting material: Epoxy.

4. Electrical

Electrical: 2000 Operations per switch 24/VDC, 25mA.

Non-Switching Rating: 100mA, 50/VDC.

Switching Rating: 25mA, 24/VDC

Contact Resistance: 100 mΩ Max. at initial.

5. Mechanical

Mechanical life: 2000 Operations per switch.

Operation Temp: -20°C to 70°C .

Storage Temp: -40°C to 85°C .

6. PART NUMBER DESCRIPTION:

DS DP 05 L H G E T

[Packing: T=Tube R=Reel]

[Finish: F=1 μ"-3 μ" Gold-plated F=10 μ" Gold-plated]

[Finish: G=Full Gold S=Contat-Gold-plated, Terminal-Tin-Plated]

[Terminal: S=SMD type H=Straight.....]

[Actuator: T=Tape sealed S=Low profile W/O Tape L=Extension]

[HP=Half-Pitch IC=IC type PV=Piano type DP=DP type]

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	东莞市广普实业有限公司 DongGuan Kingtek Industrial Co., Ltd.			
LINER	ANGLES	PROJECTION	TITLE			
.0 ± 0.30	0. ± 1°		BY DSDP SERIES PITCH 2.54mm			
.00 ± 0.20	.0 ± 0.5°		PRODUCT FAMILY DSDP SERIES			
.000± 0.10	.00±		PRAT NO. DSDP05LHGET			
DESIGN	LU ER XIN	2013/07/02	FILE NO. DSDP05LHGET-A			
DRAWING			SIZE	UNIT	SCALE	SHEET
CHECK			A4	mm	FIT	1 OF 1
APPRO.						REV. A