

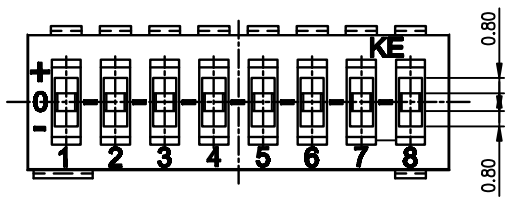



PRODUCT NO.	1
DSDT08LHGET	RoHS compliant


REV.	ECN NO.	DR	DATE	6
A	New	H H	14/12/31	

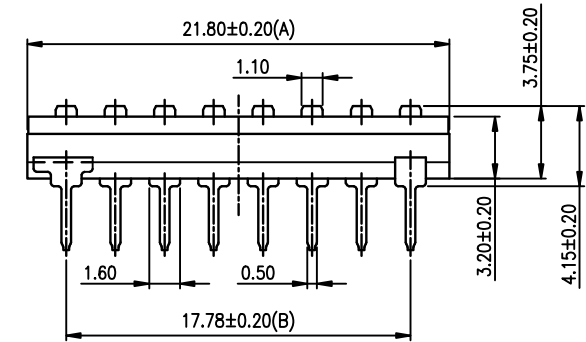

POS.	DIMENSIONS	
	A	B
4P	11.64	7.62
5P	14.18	10.16
8P	21.80	17.78
9P	24.34	20.32
10P	26.88	22.86

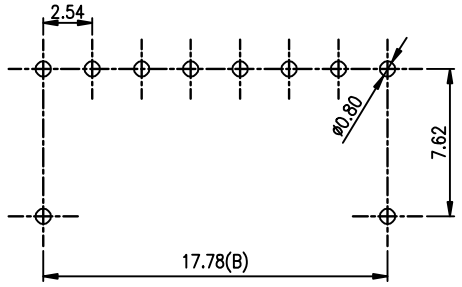

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



NOTES :


- Specification:
 - Operating force: 1000g/f Max
 - Mechanical Life: 3000cycles minimum
 - Electrical Life: 2000cycles minimum
- Contact Rating:
 - Switching: 25mA, 24VDC
 - Non Switching 100mA, 50VDC
- Contact Resistance:
 - Initial: 50mOhm Max.
 - Afer Life Test: 100mOhm Max.

- PLATING:

GOLD FLASH 1u"(min.) SOLDER TAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.
- PART NUMBER DESCRIPTION

DSDT XX L H G E T

 - [包装方式: T=管装 R=Reel]
 - [电镀层: E=接触部3u" G=接触部3u" /焊接部1~2u"]
 - [G= 镀全金 S= 内金外锡]
 - [脚型: S脚 / J脚 / H脚 / A脚 / Z脚]
 - [T= 低推贴胶 S= 低推不贴胶 L=长推]
 - [产品P数: 08=8P]



Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	PROJECTION	FILE NO.	DSDT08LHGET-A			
				LINER	ANGLES				SIZE	UNIT	SCALE	SHEET
①	Actuator	UL94 V0	White	.0 ± 0.25	0. ± 2°				A4	mm	1 : 1	1 OF 1
②	Cover	UL94 V0	Black	.00 ± 0.15	.0 ± 1°							
③	Movable	Copper Alloy	3u"Gold	.000± 0.10	.00± 0.5°							
④	Terminal	Brass	1u"Gold									
⑤	Base	UL94 V0	Black									
⑥	Terminal Contact	Brass	3u"Gold									

KE 东莞市广智实业有限公司
DongGuan Kingtek Industrial Co., Ltd.

TITLE				
BY DSDT SERIES PITCH 2.54mm				
PRODUCT FAMILY DSDT SERIES				
PRAT NO. DSDT08LHGET				
FILE NO. DSDT08LHGET-A				
SIZE	UNIT	SCALE	SHEET	REV.
A4	mm	1 : 1	1 OF 1	A