

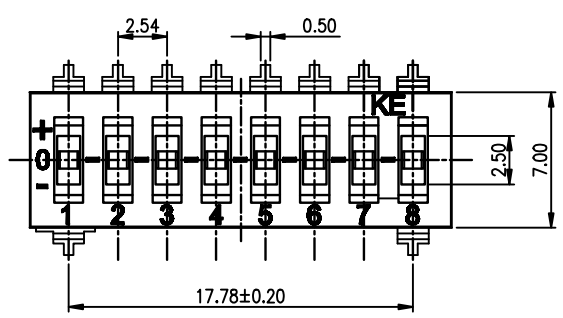


POS.	DIMENSIONS	
	A	B
4P	11.64	7.62
5P	14.18	10.16
8P	21.80	17.78
9P	24.34	20.32
10P	26.88	22.86

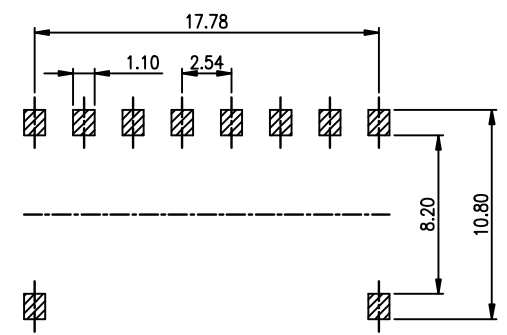

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

[SCHEMATIC]

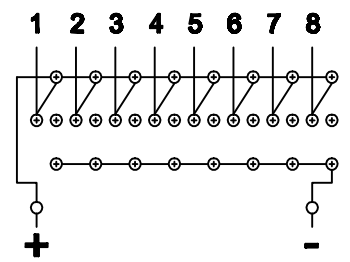

NOTES :

1.Specification:

- 1>.Operating force:1000g/f Max
- 2>.Mechanical Life:3000cycles minimum
- 3>.Electrical Life:2000cycles minimum

Contact Rating:

- 1>.Switching: 25mA,24VDC
- 2>.Non Switching 100mA,50VDC

Contact Resistance:

- 1>.Initial: 50mOhm Max.
- 2>.Afer Life Test:100mOhm Max.


2. PLATING:

GOLD FLASH 1u"(min.) SOLDERTAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION

DSDT XX L H G E T

- [包装方式: T=管装 R=Reel]
- [电镀层: E=接触部3u" G=接触部3u" /焊接部1~2u"]
- [G= 镀全金 S= 内金外锡]
- [脚型: S脚 / J脚 / H脚 / A脚 / Z脚]
- [T= 低推贴胶 S= 低推不贴胶 L=长推]
- [产品P数: 08=8P]



Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED	
LINER	ANGLES
.0 ± 0.25	0. ± 2°
.00 ± 0.15	.0 ± 1°
.000± 0.10	.00± 0.5°
DESIGN	CHI HUAI HE
DRAWING	
CHECK	
APPRO.	

INSPECTION
COPY
PROJECTION
2015/01/22

**东莞市广智实业有限公司**
DongGuan Kingtek Industrial Co., Ltd.

TITLE

BY DSDT SERIES PITCH 2.54mm

PRODUCT FAMILY DSDT SERIES

PRAT NO. DSDT08LSGET

FILE NO. DSDT08LSGET-A

SIZE	UNIT	SCALE	SHEET	REV.
A4	mm	1 : 1	1 OF 1	A