

PRODUCT NO.	1
DSHP05TSGET	RoHS compliant

NOTES :1.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature: -40° to+85°
- 3>.Storage Temperature: -40° to+85°
- 4>.Electrical life Life:2000cycles 25mA 24VDC
- 5>.Mechanical Life:3000cycles Operations





2. PLATING:

GOLD FLASH 1u"~2u" Gold SOLDER TAIL,
1u"~3u" Gold GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION :



DSHP XX T S G E T

[包装方式: T=管装 R=Reel]
[电镀层: E=接触部 1u"~3u" 焊脚部 1u"~2u" Gold]
[G= 镀全金 S= 内镀金(接触部)外镀锡(焊脚部)]
[脚型: S脚 / J脚 / H脚 / A脚 / Z脚]
[T= 低推贴胶 S= 低推不贴胶 L=长推]
[产品数 :02=2P 04=4P.....08=8P 10=10P 12=12P]

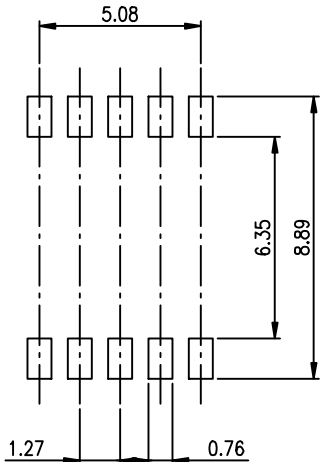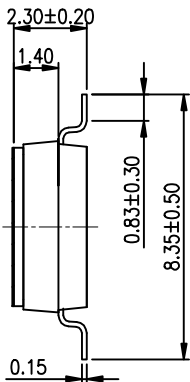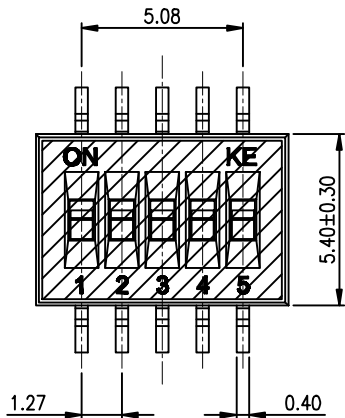

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

(Construction)



Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	1u"~3u" Gold
④	Terminal	Brass	1u"~2u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	1u"~3u" Gold
⑦	Mylar	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY
LINER	ANGLES	
.0 ± 0.25	0. ± 2°	PROJECTION
.00 ± 0.15	.0 ± 1°	
.000± 0.10	.00± 0.5°	
DESIGN	kathy	03/20/12'
DRAWING		
CHECK		
APPRO.		

东莞市广督实业有限公司 DongGuan Kingtek Industrial Co., Ltd.			
TITLE BY DSHP SERIES PITCH 1.27mm			
PRODUCT FAMILY DSHP SERIES			
PRAT NO. DSHP05TSGET			
FILE NO. DSHP05TSGET-A			
SIZE A4	UNIT mm	SCALE 2 : 1	SHEET 1 OF 1
		REV. A	