

PRODUCT NO.	RoHS compliant
DSIC02LHGER	

REV.	ECN NO.	DR	DATE





NOTES :

- 1.Specification:
 - 1>.Operating force:1000gf Max
 - 2>.Operating Temperature: -40° to+85°
 - 3>.Storage Temperature: -40° to+85°
 - 4>.Mechanical Life:3000cycles minimum
 - 5>.Electrical Life:2000cycles 25mA 24VDC
2. PLATING:

GOLD FLASH 1u"~2u"SOLDERTAIL,
1u"~3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.


3. PART NUMBER DESCRIPTION

DSIC	XX	L	H	G	E	R	
							[包装方式: T=管装 R=Reel]
							[电镀层: E=接触部 1u"~3u" / 焊接部 1u"~2u"]
							[G=镀金 S=内金外镀]
							[脚型: S脚 / J脚 / B脚 / A脚 / Z脚]
							[T=低推贴胶 S=低推不贴胶 L=长推]
							[产品数: 01=1P 03=3P 12=12P]

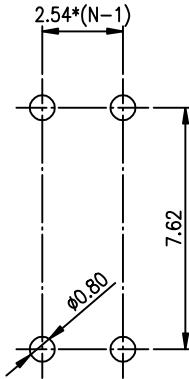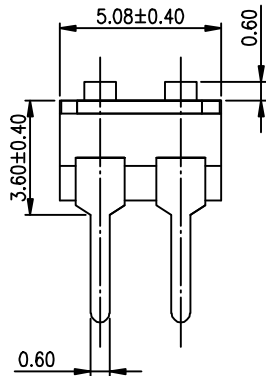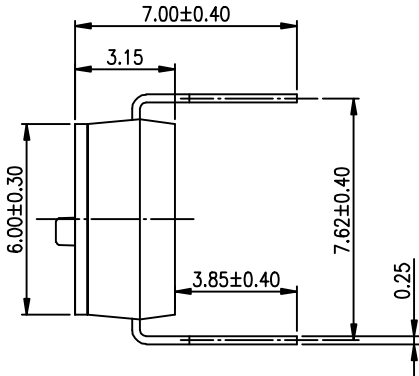
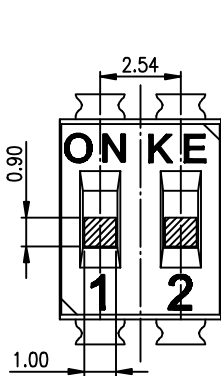


RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

[Schematic]



[推钮行程]



Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	PROJECTION	DRAWING CHECK APPRO.	FILE NO.	SIZE	UNIT	SCALE	SHEET	REV.
				LINER	ANGLES									
①	Actuator	UL94 V0	White	.0 ± 0.25	0. ± 2°					A4	mm	2 : 1	1 OF 1	A
②	Cover	UL94 V0	Black	.00 ± 0.15	.0 ± 1°									
③	Movable	Copper Alloy	1u"~3u"Gold	.000± 0.10	.00± 0.5°									
④	Terminal	Brass	1u"~2u"Gold											
⑤	Base	UL94 V0	Black											
⑥	Terminal Contact	Brass	1u"~3u"Gold											

		TITLE BY DSIC SERIES PITCH 2.54mm	
PRODUCT FAMILY DSIC SERIES		PRAT NO. DSIC02LHGER	
FILE NO. DSIC02LHGER-A		SIZE A4 UNIT mm SCALE 2 : 1 SHEET 1 OF 1 REV. A	