






1.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature:−40° to+85°
- 3>.Storage Temperature:−40° to+85°
- 4>.Mechanical Life:3000cycles minimum
- 5>.Electrical Life:2000cycles 25mA 24VDC

GOLD FLASH 1u"~2u" SOLDER TAIL,
1u"~3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.

DSIC XX T H G E R

- 【包装方式: T=管装 R=Reel】
- 【电镀层: E=接触部 1u"~3u" / 焊接部 1u"~2u"】
- 【G=镀金 S=内金外镍】
- 【脚型: S脚 / J脚 / H脚 / A脚 / Z脚】
- 【T=低推贴胶 S=低推不贴胶 L=长推】
- 【产品数: 01=1P 03=3P 12=12P】

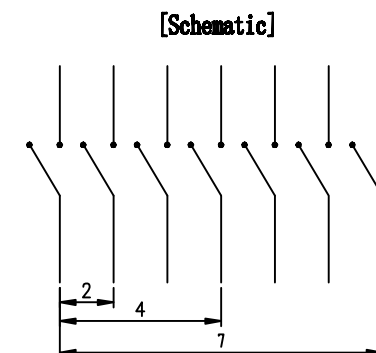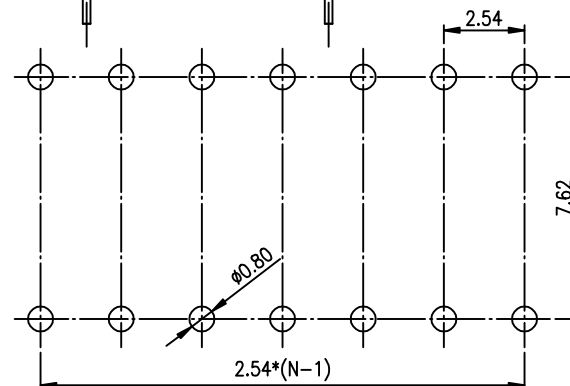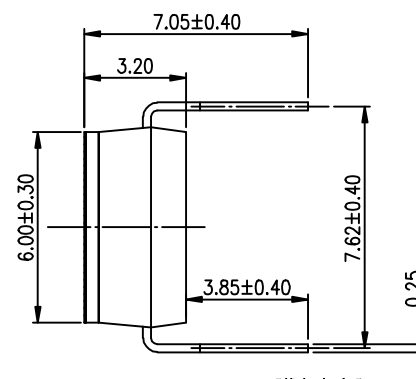

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	 东莞市广智实业有限公司 DongGuan Kingtek Industrial Co., Ltd.			
①	Actuator	UL94 V0	White	LINER	ANGLES	COPY		TITLE BY DSIC SERIES PITCH 2.54mm PRODUCT FAMILY DSIC SERIES PRAT NO. DSIC07LHGER FILE NO. DSIC07LHGER-A		
②	Cover	UL94 V0	Black							
③	Movable	Copper Alloy	1u"~3u"Gold	.00 ± 0.15	.0 ± 1'				SIZE A4	
④	Terminal	Brass	1u"~2u"Gold	.000± 0.10	.00± 0.5"					UNIT mm
⑤	Base	UL94 V0	Black	DESIGN	kathy	2012/04/12				
⑥	Terminal Contact	Brass	1u"~3u"Gold	DRAWING						SHEET 1 OF 1
⑦	Marly	UL94 V0	0.05mm	CHECK						
				APPRO.						