


组装式贴片功率电感—WPZ 系列

Assembled SMD Power Inductors—WPZ Series



工作温度
Operating Temp

◆ -40°C ~+125°C (Including self-heating)

特征
Features

- ◆ 采用高饱和特性磁材，高通流，低损耗
- ◆ 闭合磁路设计，漏磁干扰小
- ◆ 高 DCR 精度
- ◆ 无卤，符合 RoHS 标准
- ◆ High saturation characteristic core for large saturation current and low loss
- ◆ Closed magnetic circuit design reduces leakage flux
- ◆ High precision DCR
- ◆ Halogen free, RoHS compliant

用途
Applications

- ◆ 服务器、台式电脑、笔记本电脑
- ◆ 显卡、内存
- ◆ 工控设备、通讯设备
- ◆ Server, desktop computer, notebook
- ◆ Graphics, memory
- ◆ Industrial equipment, telecom base station

产品型号

Product Identification

1	2	3	4	5	6	7	8
WPZ	1008	7	S	1	R12	K	T
1	2	3	4	5	6	7	8
分类 Type	外形长宽尺寸 (L×W) [mm] External Dimensions (L×W) [mm]	外形高度尺寸 (H) [mm] External Height Dimensions (H) [mm]	磁芯材料 Magnetic Core Material	绕组数量 Number of Windings	公称感量 Nominal Inductance	感量精度 Inductance Tolerance	包装 Packing
WPZ 贴片功率电感 SMD Power Inductor	0404 4.0×4.1 0505 5.2×5.2 0606 6.4×6.4 0707 7.0×7.3 0905 9.0×5.0 0906 9.6×6.4 0907 9.5×7.5 1006 10.0×6.15 1007 10.7×7.0 1008 10.4×8.0 1010 10.0×10.0 1106 10.6×6.3 1107 11.0×7.4 1111 11.2×11.2 1205 12.0×5.0 1206 12.0×6.0 1308 13.5×8.5 1313 13.7×12.8 1612 15.3×11.3 1811 18.0×11.3	1 H<1.5 2 1.5≤H<2.5 3 2.5≤H<3.5 4 3.5≤H<4.5 5 4.5≤H<5.5 6 5.5≤H<6.5 7 6.5≤H<7.5 8 7.5≤H<8.5 9 8.5≤H<9.5 A 9.5≤H<10.5 B 10.5≤H<11.5 C 11.5≤H<12.5 D 12.5≤H<13.5 E 13.5≤H<14.5 F 14.5≤H<15.5 G 15.5≤H<16.5	B 高饱和 High Saturation S 低损耗 Low Loss F 高频 High Frequency N 镍锌 NiZn M 合金 Alloy	1 单绕组 1 Winding 2 双绕组 2 Windings	Example Nominal Value 70N 70nH R12 120nH	K ±10% L ±15% M ±20%	T 编带 Tape & Reel

外观尺寸 Shape and Dimensions — 2 Pins

Fig.1

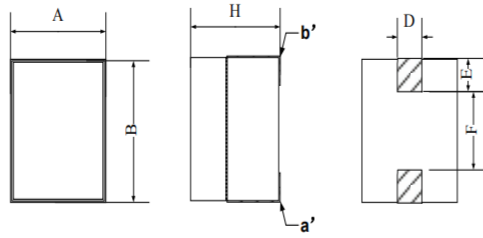


Fig.2




Fig.3

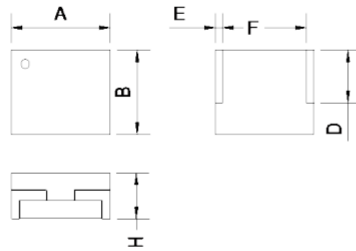


Fig.4




Fig.5

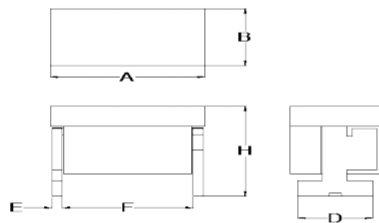


Fig.6





Fig.7

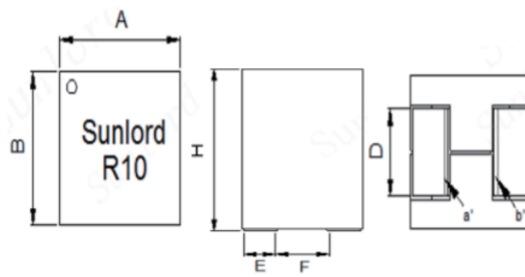

Recommended Land Pattern (Typ.)





Fig.8

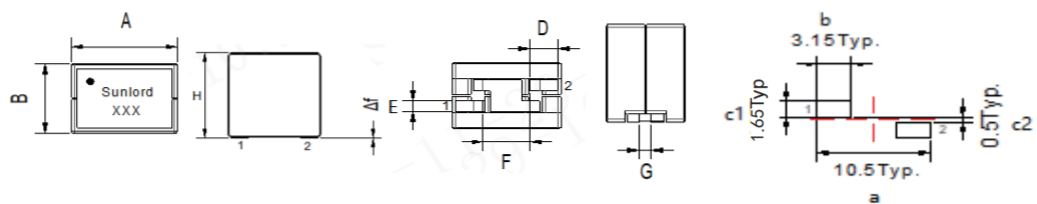

外观尺寸

Shape and Dimensions
— 2 Pins

Unit: mm

Series	Shape	A Max.	B Max.	H Max.	D	E	F	a Typ.	b Typ.	c Typ.
WPZ04044S1	Fig.1	4.0	4.1	4.0/4.3	1.4 Typ.	1.3 Typ.	/	0.9	1.7	1.9
WPZ05057B1	Fig.1	5.2	5.0	6.6	2.0±0.2	1.2±0.2	/	1.8	1.85	2.6
WPZ05057S1	Fig.1	5.2	5.2	6.5	2.0±0.2	0.7±0.2	3.7±0.3	3.2	1.15	2.5
WPZ0606AF1	Fig.7	6.5	6.5	10	3.7±0.2	1.75±0.2	2.65±0.2	2.05	2.35	4.1
WPZ07074N1	Fig.1	6.8	7.3	4.2	1.0±0.2	1.9±0.4	3.2±1.0	2.6	2.5	1.4
WPZ07074S1	Fig.1	6.8	7.3	3.8	3.0±0.2	1.6±0.3	3.8 Typ.	3.2	2.2	3.4
WPZ07075S1	Fig.1	7.0	7.0	5.0	2.5±0.25	1.5±0.3	3.9 Typ.	3.3	2.1	3.0
WPZ0707BB1	Fig.7	7.0	6.9/6.7	11	3.7±0.2	1.8±0.2	2.8±0.3	2.3	2.3	4.2
WPZ09068S1	Fig.2	9.6	6.4	8.1	2.14±0.3	2.5±0.2	4.4 Typ.	4.0	3.2	2.54
WPZ09069B1	Fig.2	9.6	6.4/6.6	9.0	2.6±0.3	2.5±0.3	3.95±0.3	3.5	3.2	3.1
WPZ09059F1	Fig.2	9.0	5.2/5.0	9.5	2.4±0.2	2.5±0.2	/	3.4	3.1	2.8
WPZ0906AB1	Fig.2	9.6	6.6/6.4	10.1	3.15±0.2	2.8±0.2	3.8 Typ.	3.4	3.3	3.6
WPZ0906AS1	Fig.2	9.6	6.6/6.4	10.1	3.15±0.2	2.8±0.2	3.8 Typ.	3.4	3.3	3.6
WPZ0906AF1	Fig.2	9.6	6.6/6.4	10.1	2.6±0.2	2.8±0.2	3.8 Typ.	3.4	3.3	3.6
WPZ09074S1	Fig.3	9.5	7.5	4.0	4.5±0.2	0.65±0.2	7.7 Typ.	7.1	1.25	4.9
WPZ09075S1	Fig.1	7.0	9.6	5.5	2.3±0.1	2.3±0.3	4.8±0.3	4.2	2.9	2.7
WPZ09079S1	Fig.3	9.5	7.5	9.0	4.3 Typ.	1.2 Typ.	6.2 Typ.	5.8	1.8	4.7
WPZ1006CB1	Fig.2	10.0	6.0/6.2	12.0	2.45±0.3	2.95±0.3	3.65±0.5	3.05	3.55	2.85
WPZ1006CS1	Fig.2	10.0	6.15/6.0	12.0	2.45±0.3	2.95±0.3	3.65±0.5	3.05	3.55	2.85
WPZ10075B1	Fig.1	7.0	10.2	5.0	2.5±0.1	1.9±0.2	6.0 Typ.	5.4	2.5	3.0
WPZ10075S1	Fig.1	7.0	10.25	5.2	2.54±0.1	2.03±0.2	/	5.08	2.8	3.05
WPZ10075M1	Fig.1	7.0	10.7	5.0	2.54±0.2	2.3±0.2	5.9 Typ.	5.3	2.9	2.94
WPZ1007AS1	Fig.2	10.0	7.0	10.0	2.2±0.25	2.5±0.3	4.1±0.3	3.5	3.1	2.6
WPZ1007CS1	Fig.7	10.7	7.9/7.7/7.5	12	3.1±0.2	2.8±0.3	4.4±0.3	3.7	3.4	3.5
WPZ10087S1	Fig.1	8.0	10.3	7.0	2.3±0.2	3.0±0.2	4.0 Typ.	3.4	3.6	2.7
WPZ10087B1	Fig.1	8.0	10.4	7.5	2.25±0.2	2.54±0.2	5.12 Typ.	4.7	3.0	2.5
WPZ10088S1	Fig.1	8.0	10.4	8.2/8.0	2.1±0.1	2.54±0.2	4.86 Typ.	4.26	3.14	2.5
WPZ1104AS1	Fig.2	11.5	3.9	11.4 Typ.	2.8±0.2	1.2±0.3	8.2±0.3	7.6	1.8	3.2
WPZ11068S1	Fig.5	10.6	6.3	8.1	5.0±0.2	0.7±0.1	8.7 Min.	8.4	1.3	5.6/3.0
WPZ11077S1	Fig.1	7.4	11.0	7.7	1.9±0.3	2.6±0.3	5.5 Typ.	4.9	3.2	2.3
WPZ11119S1	Fig.1	11.2	11.2	9.0/9.3/9.5	2.1±0.3	2.6±0.3	/	5.3	3.1	2.54
WPZ12088S1	Fig.1	8.0	12.0	8.1	1.3±0.2	2.2±0.2	7.1 Typ.	6.5	2.8	1.7
WPZ13083S1	Fig.4	8.55	13.55	3.0	8.15±0.2	0.5±0.1	12.85±0.2	11.75	1.1	8.7
WPZ13138S1	Fig.1	12.8	13.7	8.1	6.5 Typ.	2.7 Typ.	7.8 Typ.	7.2	3.2	6.9

Series	Shape	A	B	H	D	E	F	G	a Typ.	b Typ.	c1 Typ.	c2 Typ.
WPZ1007AB1	Fig.8	9.7±0.3	6.7±0.3	9.7±0.3	2.5±0.3	1.1±0.3	4.2±0.3	1.0±0.3	10.5	3.15	1.65	0.5

规格特性 Specifications

型号 Part Number	电感量 Inductance	测试条件 L Test Condition	直流电阻 DC Resistance		饱和电流 Saturation Current		温升电流 Heat Rating Current
单位 Units	nH	/	mΩ		Isat A		A
符号 Symbol	L	/	DCR		25°C	100°C	Irms
WPZ04044S122NMT	22±20%	@100kHz, 1V	0.30±10%		40	34	48
WPZ04044S150NKT	50±10%				35	30	
WPZ04044S165NKT	65±10%				30	23	
WPZ04044S1R10KT	100±10%				17	15	
WPZ05057B1R10MT	100±20%		0.503Max.	0.47Typ.	35	29	40
WPZ05057S160NMT	55±20%	@100kHz, 1V	0.25±20%		70	60	50
WPZ05057S180NMT	80±20%				50	40	
WPZ05057S1R10MT	100±20%				40	30	
WPZ05057S1R11MT	110±20%				36	27	
WPZ05057S1R15MT	150±20%				25	20	
WPZ0606AF170NKT	70±10%	@800kHz, 0.1V	0.17±10%		120	100	70
WPZ0606AF1R10KT	100±10%				85	70	
WPZ0606AF1R12KT	120±10%				70	60	
WPZ0606AF1R15KT	150±10%				56	46	
WPZ07074N1R10MT	100±20%	@100kHz, 1V	0.5 Max.		20	/	15
WPZ07074S160NMT	60±20%		0.19 Max.		51	/	30
WPZ07074S1R10MT	100±20%				34	/	
WPZ07075S160NMT	60±20%		0.32±9.4%		70	54	37
WPZ07075S170NMT	72±20%				58	45	
WPZ07075S1R10MT	105±20%				46	38	
WPZ07075S1R15MT	150±20%				34	24	
WPZ07075S1R20MT	200±20%				25	18	76
WPZ0707BB155NLT	55±15%		0.145±10%		155	130	
WPZ0707BB170NKT	70±10%				134	114	
WPZ0707BB1R10KT	100±10%				93	79	
WPZ0707BB1R12KT	120±10%				76	65	
WPZ0707BB1R15KT	150±10%				60	51	
WPZ0707BB1R22KT	220±10%				42	35	
WPZ0707BB1R33KT	330±10%				28	22	
WPZ09068S1R10KT	100±10%	@100kHz, 0.1V	0.29±5%		94	81	51
WPZ09068S1R12KT	120±10%				79	68	
WPZ09068S1R15KT	150±10%				65	55	
WPZ09068S1R18KT	180±10%				55	45	
WPZ09068S1R22KT	220±10%				44	37.5	
WPZ09068S1R28KT	280±10%				34	29	
WPZ09068S1R30KT	300±10%				32.5	27.5	
WPZ09069B170NKT	70±10%	@100kHz, 1V	0.187 Max. (0.17 Typ.)		160	136	66
WPZ09069B1R10KT	100±10%				112	96	
WPZ09069B1R12KT	120±10%				94	80	
WPZ09069B1R15KT	150±10%				75	64	
WPZ09069B1R17KT	170±10%				65	55	
WPZ09059F190NKT	90±10%	@500kHz, 0.1V	0.125±10%		90	77	63
WPZ09059F1R10KT	100±10%				80	70	
WPZ09059F1R12KT	120±10%				72	64	
WPZ09059F1R15KT	150±10%				58	51	
WPZ09059F1R18KT	180±10%				49	42	
WPZ09059F1R21KT	210±10%				38	33	
WPZ09059F1R24KT	240±10%				33	30	
WPZ09059F1R27KT	270±10%				30	26	
WPZ09059F1R33KT	330±10%				23	19	
WPZ0906AB170NKT	70±10%	@800kHz, 0.1V	0.12 Max. (0.10 Typ.)		145	126	84
WPZ0906AB1R10KT	100±10%				110	90	
WPZ0906AB1R12KT	120±10%				90	75	
WPZ0906AB1R15KT	150±10%				67	58	
WPZ0906AB1R18KT	180±10%				56	49	
WPZ0906AB1R22KT	220±10%				46	40	
WPZ0906AB1R28KT	280±10%				36	31	

规格特性 Specifications

型号 Part Number	电感量 Inductance	测试条件 L Test Condition	直流电阻 DC Resistance	饱和电流 Saturation Current		温升电流 Heat Rating Current
单位 Units	nH	/	mΩ	Isat A		A
符号 Symbol	L	/	DCR	25°C	100°C	Irms
WPZ0906AS170NKT	70±10%	@100kHz, 0.1V	0.12 Max. (0.10 Typ.)	120	104	84
WPZ0906AS1R10KT	100±10%			93	74	
WPZ0906AS1R12KT	120±10%			70	60	
WPZ0906AS1R15KT	150±10%			55	48	
WPZ0906AS1R18KT	180±10%			46	40	
WPZ0906AS1R22KT	220±10%			38	33	
WPZ0906AS1R28KT	280±10%			30	26	
WPZ0906AF170NKT	70±10%			120	104	
WPZ0906AF1R10KT	100±10%			93	74	
WPZ0906AF1R12KT	120±10%			70	60	
WPZ0906AF1R15KT	150±10%			55	48	
WPZ0906AF1R18KT	180±10%			46	40	
WPZ0906AF1R22KT	220±10%			38	33	
WPZ0906AF1R28KT	280±10%			30	26	
WPZ09074S170NLT	70±15%	@800kHz, 0.1V	0.32±10%	78	/	39
WPZ09074S1R10LT	100±15%			55	/	
WPZ09074S1R14LT	140±15%			39	/	
WPZ09074S1R15LT	150±15%			33	/	
WPZ09074S1R18LT	175±15%			28	/	
WPZ09075S170NLT	70±15%	@100kHz, 1V	0.14±10%	100	85	65 Min
WPZ09075S1R10LT	100±15%			70	59	
WPZ09075S1R12LT	120±15%			58	49	
WPZ09075S1R15LT	150±15%			46	39	
WPZ09075S1R18LT	180±15%			38	33	
WPZ09075S1R22LT	220±15%			31	27	
WPZ09079S1R10LT	100±15%	@800kHz, 1V	0.20 Max. (0.17 Typ.)	80	/	50
WPZ09079S1R12LT	120±15%			66	/	
WPZ09079S1R15LT	150±15%			53	/	
WPZ09079S1R18LT	180±15%			44	/	
WPZ09079S1R22LT	220±15%			36	/	
WPZ09079S1R28LT	280±15%			28	/	
WPZ09079S1R30LT	300±15%			26	/	
WPZ1006CB170NLT	70±15%	@100kHz, 1V	0.125±10%	175	150	70
WPZ1006CB180NLT	80±15%			155	130	
WPZ1006CB1R10LT	100±15%			125	105	
WPZ1006CB1R12LT	120±15%			105	88	
WPZ1006CB1R14LT	135±15%			92	77	
WPZ1006CB1R15LT	150±15%			83	70	
WPZ1006CB1R22LT	220±15%			52	42	
WPZ1006CB1R25LT	250±15%			46	36	
WPZ1006CB1R33LT	330±15%			35	28	
WPZ1006CS170NLT	70±15%			152	130	
WPZ1006CS180NLT	80±15%			134	113	
WPZ1006CS1R10LT	100±15%			108	92	
WPZ1006CS1R12LT	120±15%			91	76	
WPZ1006CS1R14LT	135±15%			80	67	
WPZ1006CS1R15LT	150±15%			72	60	
WPZ1006CS1R22LT	220±15%			45	36	
WPZ1006CS1R25LT	250±15%			40	31	
WPZ1006CS1R33LT	330±15%			30	24	

规格特性
Specifications

型号 Part Number	电感量 Inductance	测试条件 L Test Condition	直流电阻 DC Resistance	饱和电流 Saturation Current		温升电流 Heat Rating Current
单位 Units	nH	/	mΩ	Isat A		A
符号 Symbol	L	/	DCR	25℃	100℃	Irms
WPZ10075B1R12KT	120±10%	@100kHz, 1V	0.35±10%	61	/	31
WPZ10075B1R15KT	150±10%			49	/	
WPZ10075B1R20KT	200±10%			37	/	
WPZ10075B1R22KT	220±10%			32	/	
WPZ10075B1R30KT	300±10%			21	/	
WPZ10075S170NKT	70±10%		0.1375 Max.	85	78	40
WPZ10075S1R10KT	100±10%			60	55	
WPZ10075S1R12KT	120±10%			50	45	
WPZ10075S1R15KT	150±10%			40	36	
WPZ10075S1R20KT	200±10%			30	27	
WPZ10075S1R30KT	300±10%		0.23±10%	19	17	
WPZ10075M170NLT	70±15%			130	/	68
WPZ10075M1R10LT	100±15%			96	/	
WPZ10075M1R12LT	120±15%			80	/	
WPZ10075M1R15LT	150±15%			64	/	
WPZ10075M1R16LT	160±15%			60	/	
WPZ1007AS170NLT	70±15%		0.17±10%	165	120	75
WPZ1007AS1R10LT	100±15%			135	100	
WPZ1007AS1R12LT	120±15%			107	80	
WPZ1007AS1R15LT	150±15%			92	75	
WPZ1007AS1R20LT	200±15%			68	51	
WPZ1007AS1R22LT	220±15%		0.150±10%	62	47	72
WPZ1007AS1R33LT	330±15%			37	28	
WPZ1007CS170NKT	70±10%			194	181	
WPZ1007CS1R10KT	100±10%			136	126	
WPZ1007CS1R12KT	120±10%			113	105	60
WPZ1007CS1R15KT	150±10%			90	84	
WPZ1007CS1R18KT	180±10%			75	70	
WPZ1007CS1R20KT	200±10%			67	62	
WPZ1007CS1R22KT	220±10%			61	57	
WPZ1007CS1R27KT	270±10%		0.29±10%	51	47	61
WPZ1007CS1R33KT	330±10%			41	38	
WPZ1007CS1R47KT	470±10%			29	27	
WPZ10087S1R10KT	100±10%			96	/	
WPZ10087S1R12KT	120±10%			80	/	61
WPZ10087S1R15KT	150±10%			72	/	
WPZ10087S1R17KT	170±10%			58	/	
WPZ10087S1R20KT	200±10%			48	/	
WPZ10087S1R22KT	220±10%		0.29±5%	46	/	
WPZ10087S1R30KT	300±10%			32	/	61
WPZ10087S1R33KT	330±10%			28	/	
WPZ10087B1R10KT	100±10%			108	98	
WPZ10087B1R12KT	115±10%			94	86	
WPZ10087B1R15KT	150±10%			76	70	
WPZ10087B1R17KT	175±10%			66	60	
WPZ10087B1R20KT	200±10%			57	52	
WPZ10087B1R22KT	215±10%			50	43	61
WPZ10087B1R23KT	230±10%			48	40	
WPZ10087B1R27KT	270±10%			40	34	
WPZ10087B1R30KT	300±10%			35	30	

规格特性 Specifications

型号 Part Number	电感量 Inductance	测试条件 L Test Condition	直流电阻 DC Resistance	饱和电流 Saturation Current		温升电流 Heat Rating Current
单位 Units	nH	/	mΩ	Isat A		A
符号 Symbol	L	/	DCR	25°C	100°C	Irms
WPZ10088S180NKT	80 ± 10%	@100kHz, 0.1V	0.18 ± 5%	130	120	68
WPZ10088S182NKT	82 ± 10%			126	116	
WPZ10088S1R10KT	100 ± 10%			113	100	
WPZ10088S1R12KT	120 ± 10%			95	84	
WPZ10088S1R15KT	150 ± 10%			78	69	
WPZ10088S1R18KT	180 ± 10%			62	56	
WPZ10088S1R22KT	220 ± 10%			52	45	
WPZ10088S1R27KT	270 ± 10%			41	36	
WPZ10088S1R30KT	300 ± 10%			35	33	
WPZ10088S1R33KT	330 ± 10%			33	30	
WPZ1104AS170NKT	70 ± 10%	@1MHz, 0.1V	0.2 Max.	100	90	40
WPZ11068S1R10KT	100 ± 10%	@300kHz, 0.1V	0.35 Max.	90	75	40
WPZ11068S1R12KT	120 ± 10%			78	67	
WPZ11068S1R16KT	160 ± 10%			60	50	
WPZ11068S1R20KT	200 ± 10%			45	38	
WPZ11077S170NKT	70 ± 10%	@100kHz, 1V	0.29 ± 10%	150	140	39
WPZ11077S1R12KT	120 ± 10%			95	83	
WPZ11077S1R15KT	150 ± 10%			80	62	
WPZ11077S1R17KT	170 ± 10%			70	55	
WPZ11077S1R20KT	200 ± 10%			60	45	
WPZ11077S1R23KT	230 ± 10%			50	36	
WPZ11077S1R30KT	300 ± 10%			37	28	
WPZ11077S1R40KT	400 ± 10%			25	18	
WPZ11077S1R50KT	500 ± 10%			18	13	
WPZ11077S1R51KT	510 ± 10%			18	13	
WPZ11119S150N □ T	50	@100kHz, 1V	0.42 ± 10%	180	/	43
WPZ11119S1R10 □ T	100			145	/	
WPZ11119S1R12 □ T	120			120	/	
WPZ11119S1R15 □ T	150			100	/	
WPZ11119S1R20 □ T	200			80	/	
WPZ11119S1R25 □ T	250			63	/	
WPZ11119S1R27 □ T	270			58	/	
WPZ11119S1R30 □ T	300			53	/	
WPZ11119S1R33 □ T	330			46	/	
WPZ11119S1R47 □ T	470			36	/	
WPZ11119S1R56 □ T	560			30	/	
WPZ11119S11R0 □ T	1000			13	/	
WPZ12088S1R15KT	150 ± 10%		0.29 ± 5%	85	/	50
WPZ12088S1R18KT	180 ± 10%			72	/	
WPZ12088S1R21KT	210 ± 10%			65	/	
WPZ12088S1R23KT	230 ± 10%			60	/	
WPZ12088S1R25KT	250 ± 10%			52	/	
WPZ12088S1R45KT	450 ± 10%			24	/	
WPZ12088S1R47KT	470 ± 10%			22	/	
WPZ13083S1R11KT	110 ± 10%	@100kHz, 0.1V	0.45 ± 10%	65	/	30
WPZ13083S1R15KT	145 ± 10%			50	/	
WPZ13083S1R21KT	210 ± 10%			34	/	
WPZ13083S1R26KT	260 ± 10%			27	/	
WPZ13083S1R32KT	320 ± 10%			22	/	

规格特性 Specifications

型号 Part Number	电感量 Inductance	测试条件 L Test Condition	直流电阻 DC Resistance	饱和电流 Saturation Current		温升电流 Heat Rating Current
单位 Units	nH	/	mΩ	Isat A		A
符号 Symbol	L	/	DCR	25℃	100℃	Irms
WPZ13138S1R11KT	110 ± 10%	@100kHz, 1V	0.19 ± 10%	140	113	68
WPZ13138S1R15KT	150 ± 10%			100	80	
WPZ13138S1R18KT	180 ± 10%			85	68	
WPZ13138S1R21KT	210 ± 10%			80	64	
WPZ13138S1R26KT	260 ± 10%			61	50	
WPZ13138S1R32KT	320 ± 10%			45	36	
WPZ13138S1R36KT	360 ± 10%			40	32	
WPZ13138S1R44KT	440 ± 10%			37	30	
WPZ13138S1R50KT	500 ± 10%			28	22	
WPZ1007AB1R47KT	470 ± 10%	@100kHz, 1V	0.891 Max. (0.81 Typ.)	48	38	30
WPZ1007AB1R68KT	680 ± 10%			34	29	

※1: 所有的测试数据均在 20℃ 环境温度进行;

※1: All test data is referenced to 25℃ ambient;

※2: 饱和电流: 使电感值从初始状态下下降约 20% 的直流电流值;

※2: Isat: DC current at which the inductance drops approximate 20% from its value without current;

※3: 温升电流: 使产品表面温度从 25℃ 升高 (ΔT = 40℃) 的直流电流值。

※3: I_{rms}: DC current that causes the temperature rise (ΔT) from 25℃ ambient when two coils connected in series, ΔT is approximate 40℃.

※4: "□" 代表电感公差, K±10%, L±15%, M±20%。

※4: "□" stands for inductance tolerance, K±10%, L±15%, M±20%.

外观尺寸 Shape and Dimensions — 4 Pins

Fig.1




Fig.2





Fig.3



Recommended Land Pattern (Typ.)






Fig.4

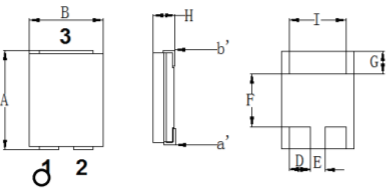

Recommended Land Pattern (Typ.)

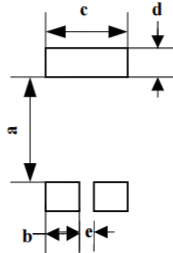

外观尺寸


Shape and Dimensions
—4 Pins

Unit: mm

Series	Shape	A Max.	B Max.	H Max.	D Max.	E Max.	F Max.	G Max.	I Max.	a Typ.	b Typ.	c Typ.	d Typ.	e Typ.
WPZ06065S1	Fig.3	6.4	6.4	5.3	1.82	2.9	5.5	0.55	3.7	4.7	2.2	3.9	1.0	2.1
WPZ10103S1	Fig.2	10.0	10.0	3.35	2.8	3.3	8.9	0.6	7.6	8.0	3.2	7.8	1.25	2.6
WPZ10106S1	Fig.1	10.0	10.0	6.0	2.7	4.0	8.6	0.7	6.2	8.0	3.0	6.5	1.2	3.3
WPZ16123S1	Fig.4	15.3	11.3	3.0	3.2	2.65	10.3	2.7	8.65	8.6	4.0	9.5	3.9	1.5
WPZ18113S1	Fig.4	18.0	11.4	3.0	/	/	/	/	/	11.6	3.7	9.0	3.2	/

等效电路

Equivalent Circuit



规格特性


Specifications

型号 Part Number	电感量 Inductance	测试条件 L Test Condition	直流电阻 DC Resistance	饱和电流 Saturation Current		温升电流 Heat Rating Current	温升电流 (pin1-2) Heat Rating Current
单位 Units	nH	/	mΩ	Isat A		A	A
符号 Symbol	L	/	DCR	25℃	100℃	Irms	Irms
WPZ06065S1R10KT	100±10%	@1MHz, 1V	0.4±12.5%	50	40	/	24
WPZ06065S1R12KT	120±10%			41	33	/	
WPZ06065S1R15KT	150±10%			33	26	/	
WPZ06065S1R20KT	200±10%			25	20	/	
WPZ10103S1R10LT	100±15%		0.45±15%	79	/	61	31
WPZ10103S1R15LT	150±15%			52	/	41	
WPZ10103S1R22LT	220±15%			36	/	28	
WPZ10103S1R30LT	300±15%			26	/	20	
WPZ10106S1R10KT	100±10%		0.66±10%	120	/	95	20
WPZ10106S1R20KT	200±10%			60	/	50	
WPZ10106S1R22KT	220±10%			54	/	43	
WPZ10106S1R30KT	300±10%			43	/	33	
WPZ10106S1R45KT	450±10%			29	/	23	
WPZ10106S1R50KT	500±10%			26	/	20	
WPZ16123S1R16KT	145~185	@300KHz, 1V	0.66 Max.	55	45	/	28.5
WPZ18113S1R25KT	250±10%			30	/	/	25

外观尺寸


Shape and Dimensions
—4 Pins

Fig.1

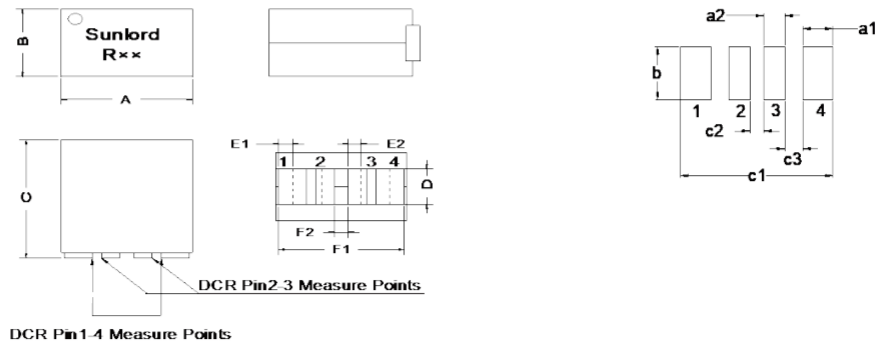


外观尺寸 Shape and Dimensions — 4 Pins

Fig.2

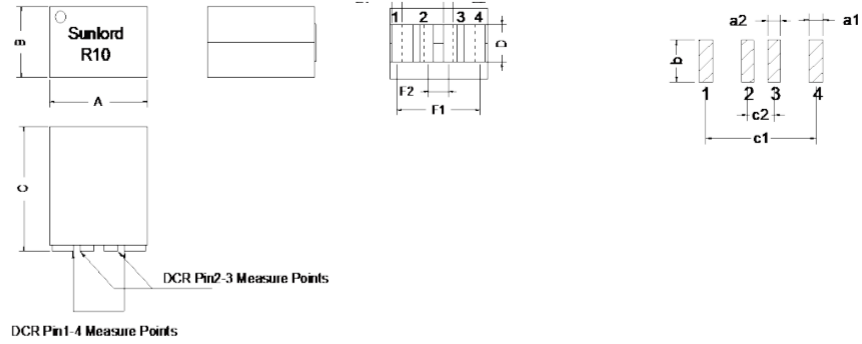

Unit: mm

Series	Shape	A Max.	B Max.	C Max.	D Max.	E1 Max.	E2 Max.	F1 Max.	F2 Max.	a1 Typ.	a2 Typ.	b Typ.	c1 Typ.	c2 Typ.	c3 Typ.
WPZ0906AS2	Fig.1	9.6	6.4	10.0	3.4	1.8	1.3	9.75	1.9	2.15	1.45	3.6	10.1	1.0	3.1
WPZ0906BS2	Fig.1	9.6	6.4	11.4	3.25	1.65	1.06	9.55	1.78	1.85	1.26	3.55	9.75	0.98	1.275
WPZ1006CS2	Fig.2	10.3	6.4	12.3	3.3Typ.	2.55Typ.	1.4Typ.	/	3.5 Typ.	1.85	1.1	3.8	8.55	2.1	/
WPZ1206CS2	Fig.1	12.0	5.0/5.1	12.0	2.2	1.85	1.55	11.99	1.4	2.15	1.6	2.4	12.25	0.8	/
WPZ1206AB2	Fig.1	12.0	6.0	10.0	3.0	1.86	1.5	/	1.9	2.16	1.8	3.2	12.15	1.0	1.62
WPZ1206BS2	Fig.2	12.0	6.0	11.1	2.75	1.6	1.45	10.6	3.15	1.8	1.65	2.85	10.1	2.65	/
WPZ1206BB2	Fig.2	12.0	6.0	11.1	2.75	1.6	1.45	11.9	/	1.8	1.65	2.85	10.1	2.65	/
WPZ1206CS2	Fig.1	12.0	6.0/6.1	12.1	2.9	1.93	1.57	11.76	1.65	2.13	1.77	3.05	12.2	0.85	/
WPZ1206CB2	Fig.1	12.0	6.0/6.1	12.1	2.9	1.93	1.57	12.0	1.65	2.13	1.77	3.05	12.2	0.85	/



Δf: Clearance between terminal and the surface of plate must be 0.1mm Max. when coil is placed on a flat plate. (Refer to Fig.3)

规格特性 Specifications

型号 Part Number	电感量 Inductance	测试条件 L Test Condition	直流电阻 DC Resistance		饱和电流 Saturation Current		温升电流 Heat Rating Current		耐压 Hi-Pot	漏感 Lk
										@25°C
单位 Units	nH	/	mΩ		Isat (Pin1-4) A		A		/	nH
符号 Symbol	L(Pin1-4)	/	Pin1-4	Pin2-3	25°C	100°C	Irms (Pin1-4)	Irms (Pin2-3)	Pri(1.4)- Sec(2.3)	Pin1-4 (Shorted Pin2-3)
WPZ0906AS2R10LT	100±15%	@500KHz 0.25V	0.125±10%	0.45±10%	92	82	75	39	100Vdc 2s 2mA	20nH Ref.
WPZ0906AS2R12LT	120±15%				75	66				
WPZ0906AS2R15LT	150±15%				60	52				
WPZ0906BS270NLT	70±15%	@100KHz, 0.1V	0.125±10%	0.60±10%	149	129	75	33		
WPZ0906BS280NLT	80±15%				131	113				
WPZ0906BS2R10LT	100±15%				105	91				
WPZ0906BS2R11LT	110±15%				95	82				
WPZ0906BS2R12LT	120±15%				87	75				
WPZ0906BS2R15LT	150±15%				70	60				
WPZ0906BS2R17LT	170±15%				61	53				



规格特性
Specifications

型号 Part Number	电感量 Inductance	测试条件 L Test Condition	直流电阻 DC Resistance		饱和电流 Saturation Current		温升电流 Heat Rating Current		耐压 Hi-Pot	漏感 Lk						
										@25°C						
单位 Units	nH	/	mΩ		Isat (Pin1-4) A		A		/	nH						
符号 Symbol	L(Pin1-4)	/	Pin1-4	Pin2-3	25°C	100°C	Irms (Pin1-4)	Irms (Pin2-3)	Pri(1.4)- Sec(2.3)	Pin1-4 (Shorted Pin2-3)						
WPZ1006CS2R10LT	100±15%	@100KHz, 1V	0.125±10%	0.33±10%	105	90	75	47	/	/						
WPZ1006CS2R12LT	120±15%				87	75										
WPZ1006CS2R15LT	150±15%				70	60										
WPZ1205CS270NLT	70±15%		0.125±10%	0.45±10%	145	126	75	39	100Vdc 2s 2mA	10nH Ref.						
WPZ1205CS2R10LT	100±15%				102	90										
WPZ1205CS2R12LT	120±15%				85	74										
WPZ1205CS2R15LT	150±15%				68	59										
WPZ1205CS2R17LT	170±15%	57			50											
WPZ1206AB270NLT	70±15%	155			140											
WPZ1206AB2R10LT	100±15%	110			100											
WPZ1206AB2R12LT	120±15%	@600KHz, 1V	0.115 Max. (0.10Typ.)	0.74 Max. (0.64Typ.)	92	82	88	39	10nH Max.							
WPZ1206AB2R15LT	150±15%				70	65										
WPZ1206AB2R18LT	180±15%				60	55										
WPZ1206BS270NLT	70±15%	@100KHz, 1V	0.143Max. (0.13Typ.)	0.429Max. (0.39Typ.)	157	142	78	45	200Vdc 2s 2mA	20%*L Max.						
WPZ1206BS2R10LT	100±15%				112	100										
WPZ1206BS2R12LT	120±15%				94	83										
WPZ1206BS2R15LT	150±15%				74	66										
WPZ1206BS2R17LT	170±15%				64	58										
WPZ1206BS2R20LT	200±15%				55	50										
WPZ1206BB270NLT	70±15%				157	142										
WPZ1206BB2R10LT	100±15%				112	100										
WPZ1206BB2R12LT	120±15%				94	83										
WPZ1206BB2R15LT	150±15%				74	66										
WPZ1206BB2R17LT	170±15%				64	58										
WPZ1206BB2R20LT	200±15%				55	50										
WPZ1206CS270NLT	70±15%				0.125±10%	0.37±10%					178	145	75	40	100Vdc 2s 2mA	10nH Ref.
WPZ1206CS2R10LT	100±15%										125	100				
WPZ1206CS2R12LT	120±15%										106	88				
WPZ1206CS2R15LT	150±15%	82	70													
WPZ1206CS2R17LT	170±15%	73	60													
WPZ1206CB270NLT	70±15%	186	160													
WPZ1206CB2R10LT	100±15%	130	112													
WPZ1206CB2R12LT	120±15%	108	93													
WPZ1206CB2R15LT	150±15%	87	75													
WPZ1206CB2R17LT	170±15%	76	66													

※1: 所有的测试数据均在 25°C 环境温度进行;
※1: All test data is referenced to 25°C ambient;
※2: 饱和电流: 使电感值从初始状态下下降约 20% 的直流电流值;
※2: Isat: DC current at which the inductance drops approximate 20% from its value without current;
※3: 温升电流: 使产品表面温度从 25°C 升高 (ΔT=40°C) 的直流电流值。
※3: I_{rms}: DC current that causes the temperature rise (ΔT) from 25°C ambient when two coils connected in series, ΔT is approximate 40°C.

电气特性
Typical
Electrical
Characteristics



WPZ04044S1 Series

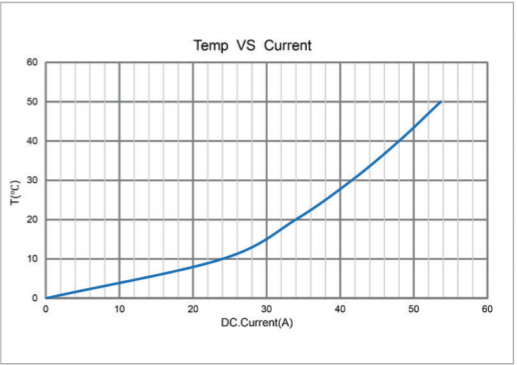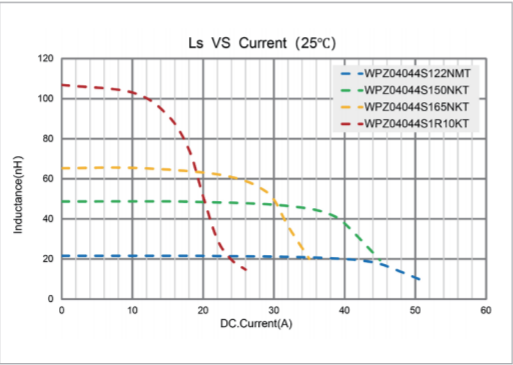



电气特性

Typical
Electrical
Characteristics



WPZ05057B1 Series

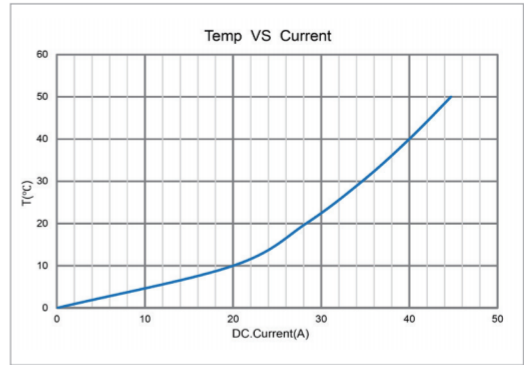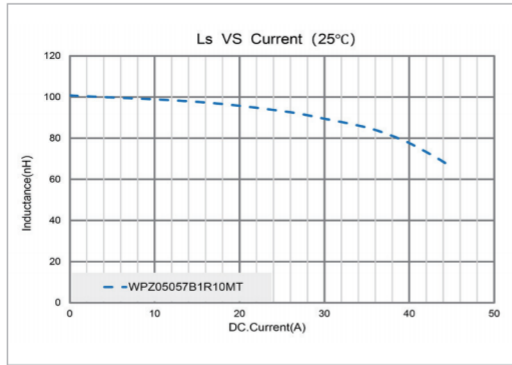



WPZ05057S1 Series

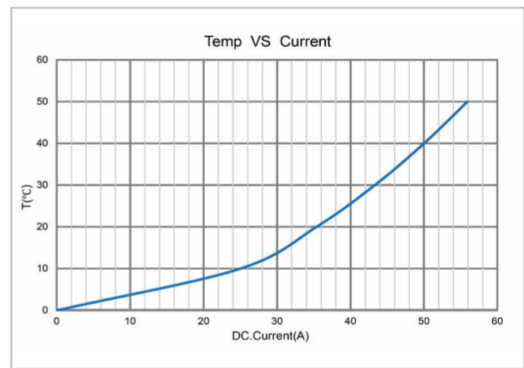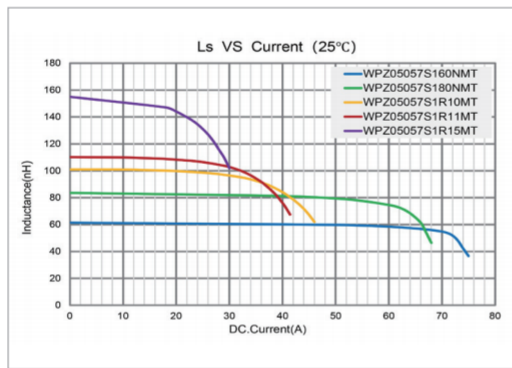

WPZ0606AF1 Series

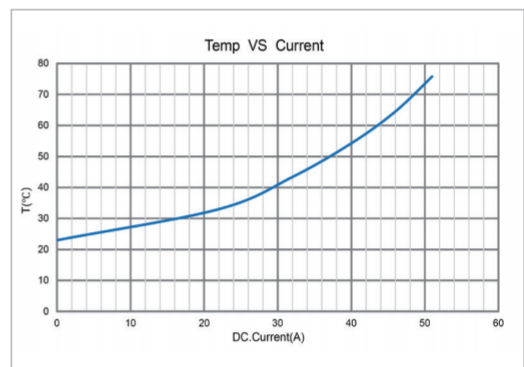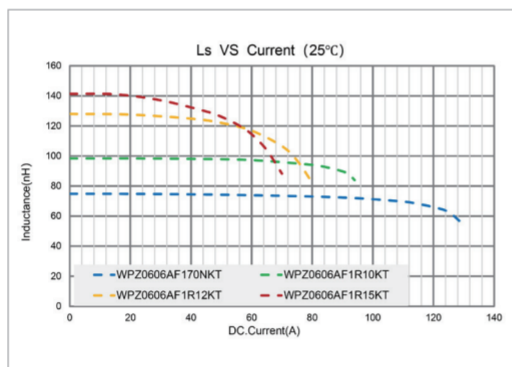



WPZ07074N1 Series

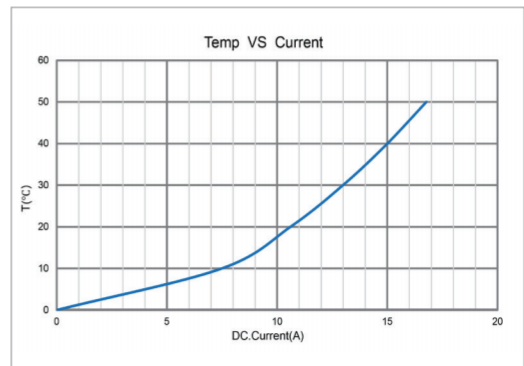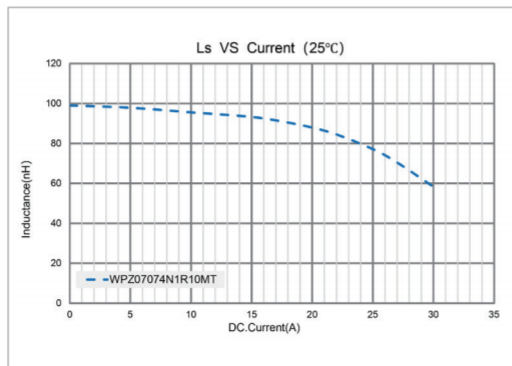



电气特性

Typical
Electrical
Characteristics



WPZ07074S1 Series

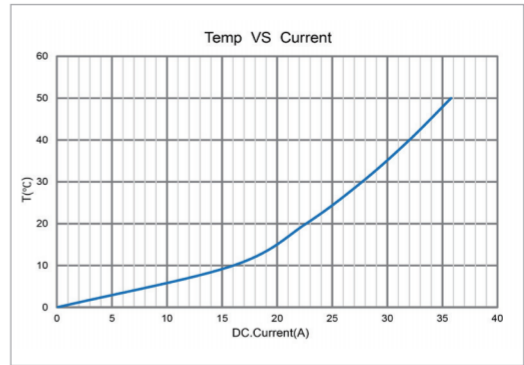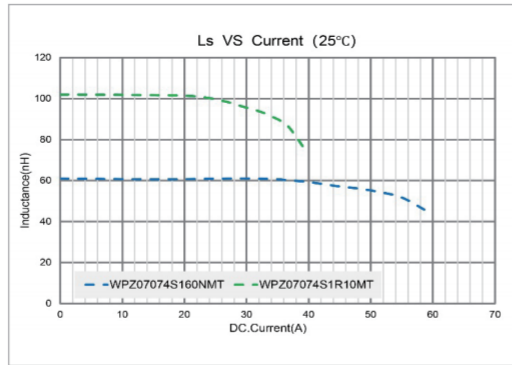



WPZ07075S1 Series

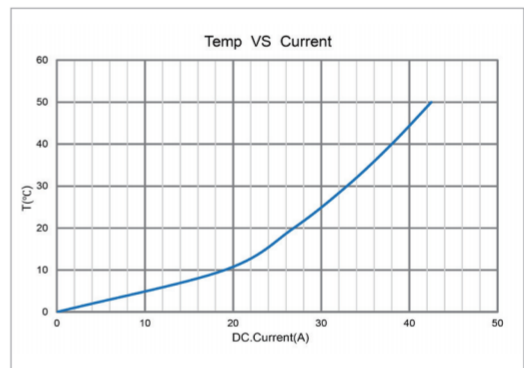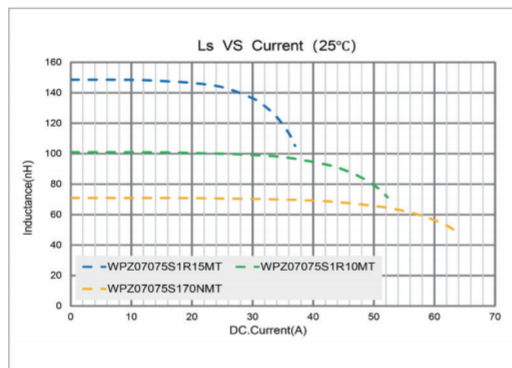

WPZ0707BB1 Series

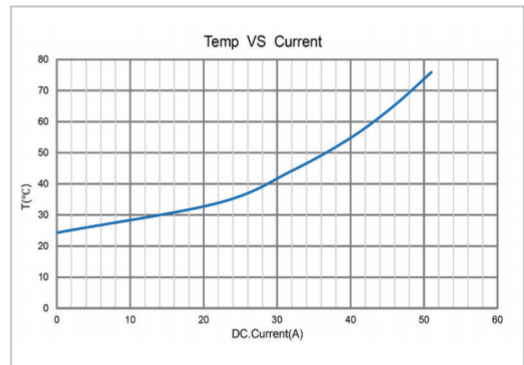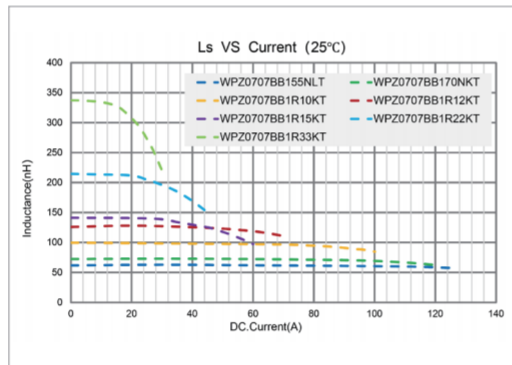



WPZ09068S1 Series

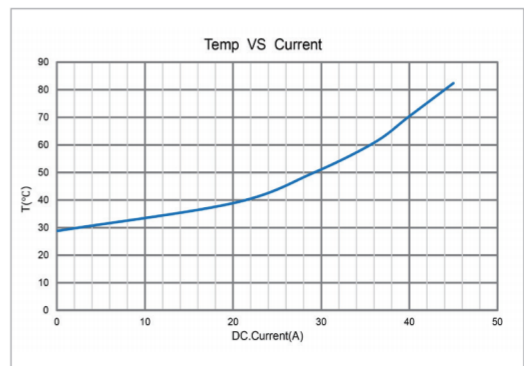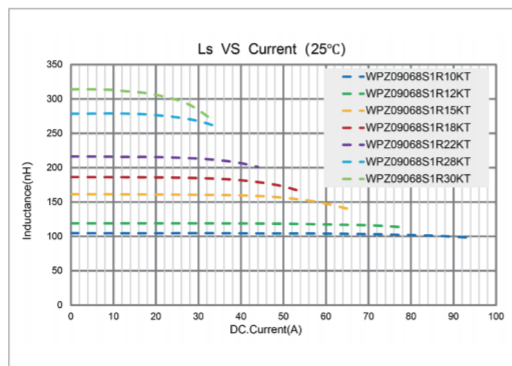



电气特性

Typical Electrical Characteristics



WPZ09069B1 Series

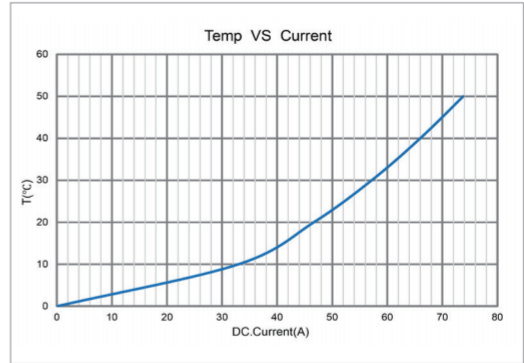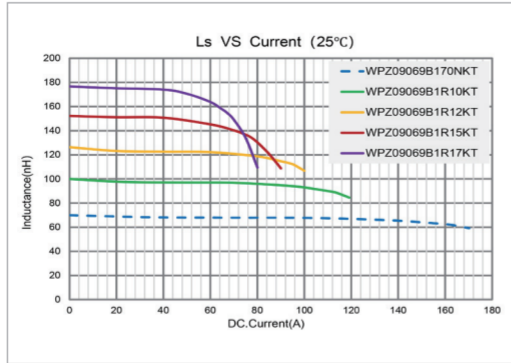



WPZ09059F1 Series

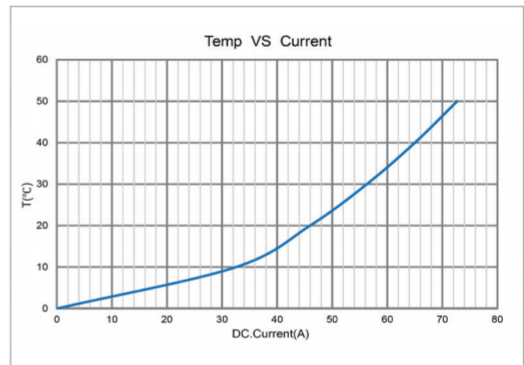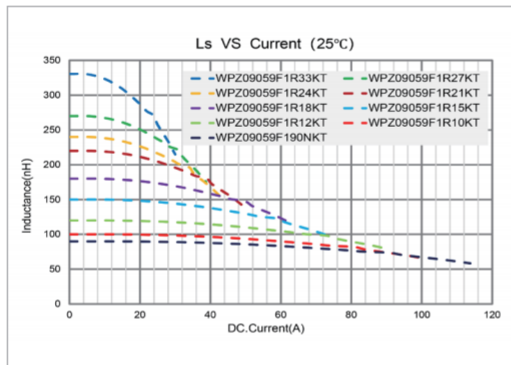

WPZ0906AB1 Series

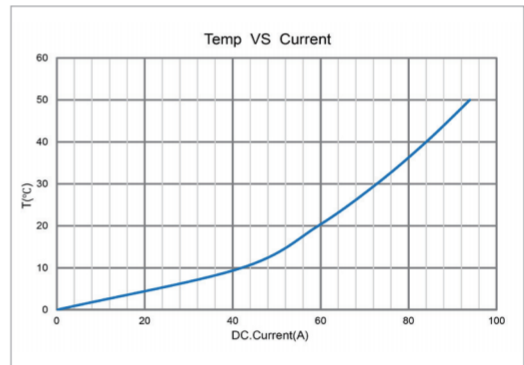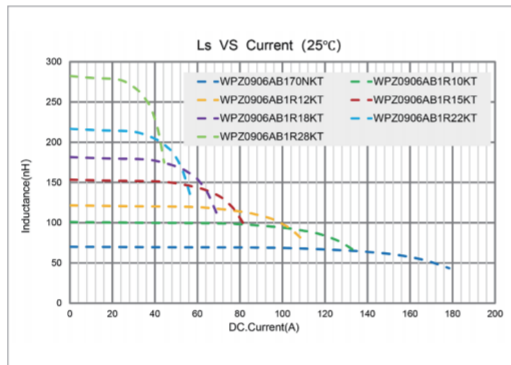



WPZ0906AS1 Series

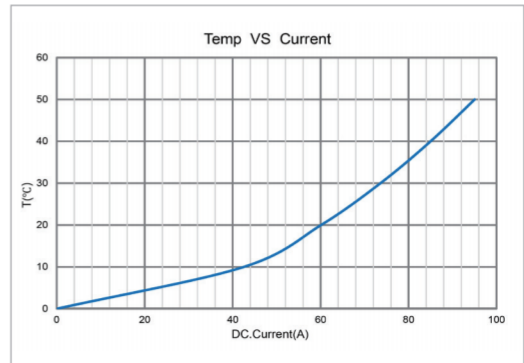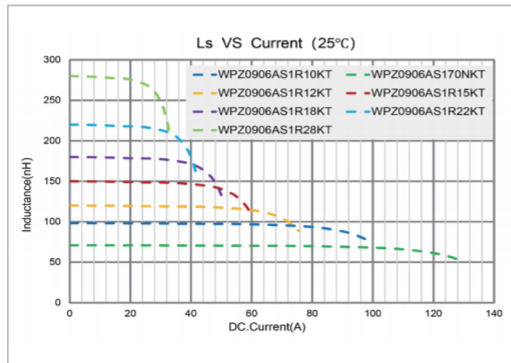



电气特性

Typical
Electrical
Characteristics



WPZ0906AF1 Series

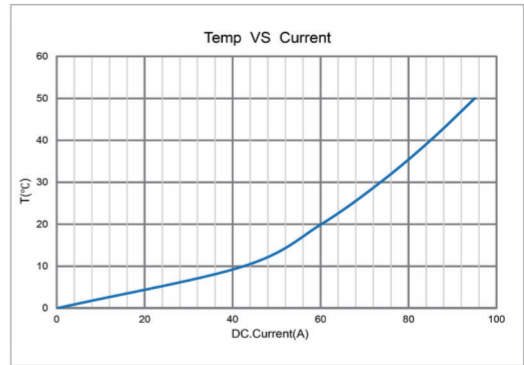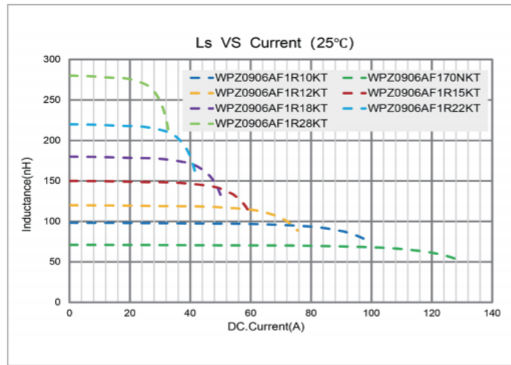



WPZ09074S1 Series

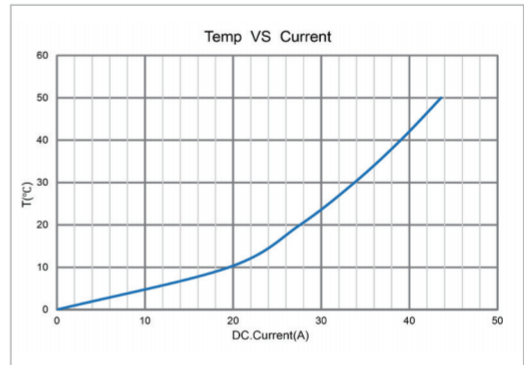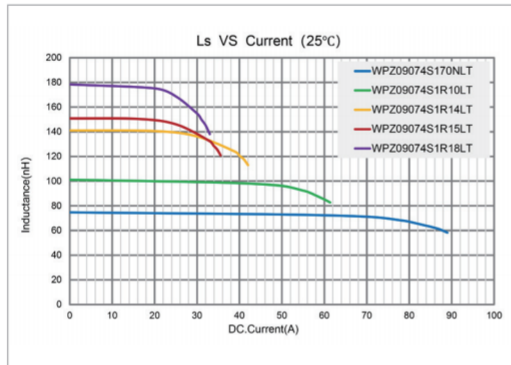

WPZ09075S1 Series

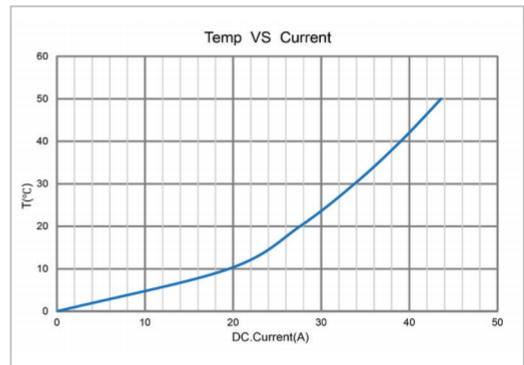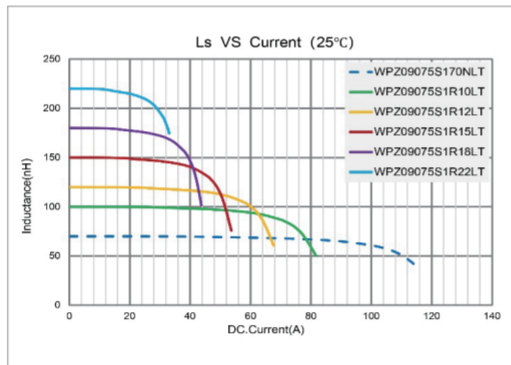



WPZ09079S1 Series

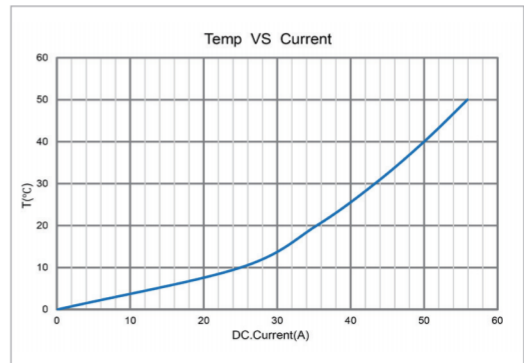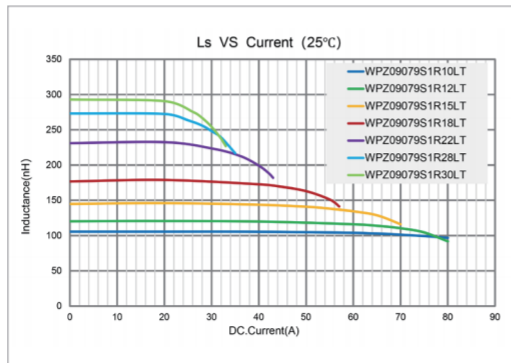



电气特性

Typical Electrical Characteristics



WPZ1006CB1 Series

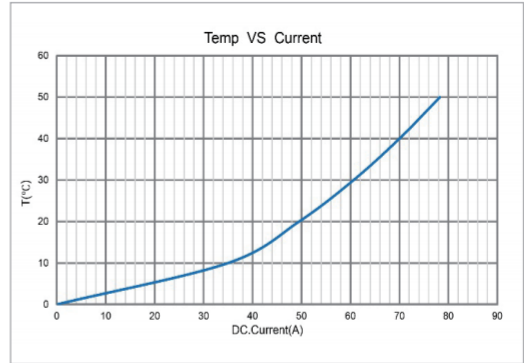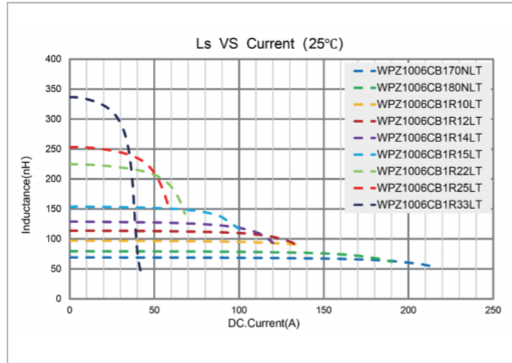



WPZ1006CS1 Series

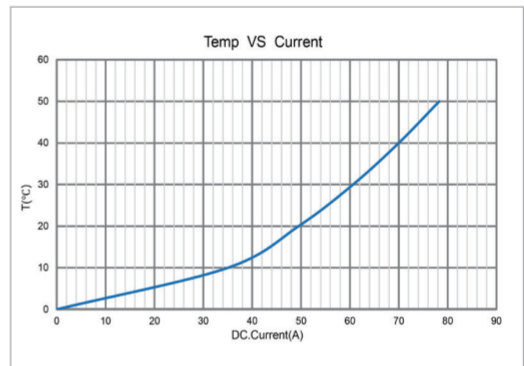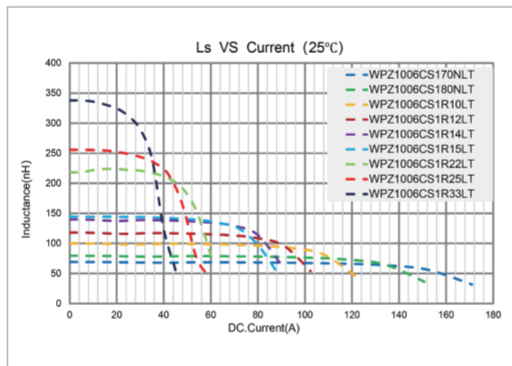

WPZ10075B1 Series

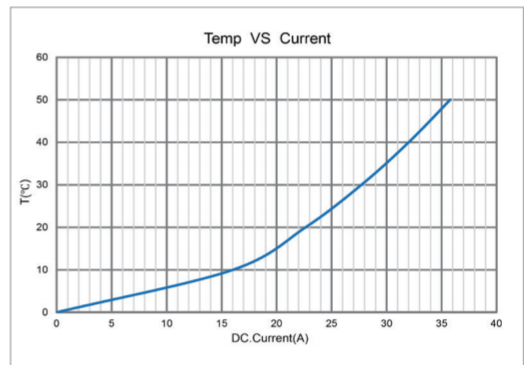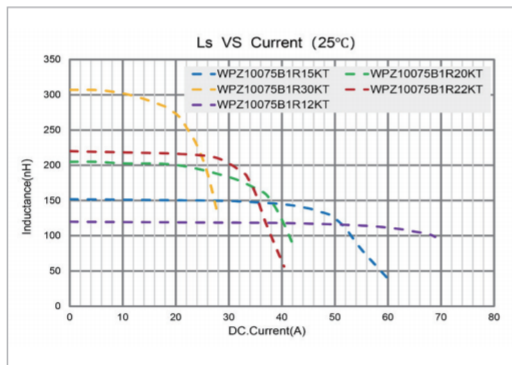



WPZ10075S1 Series

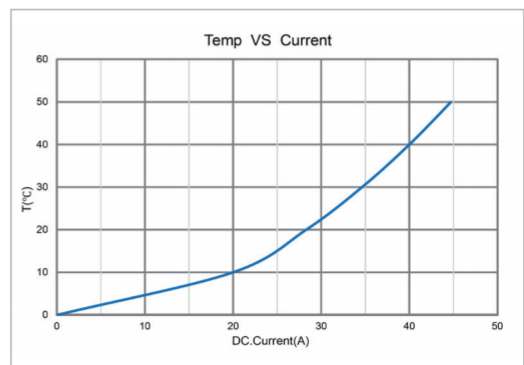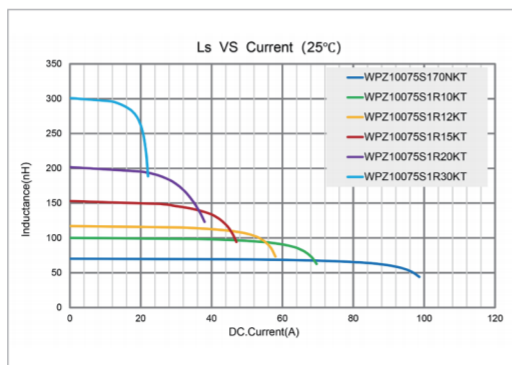



电气特性

Typical
Electrical
Characteristics



WPZ10075M1 Series

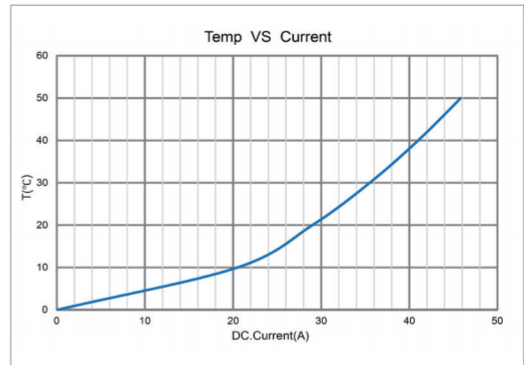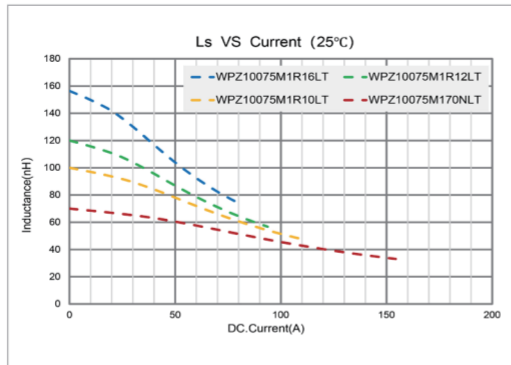



WPZ1007AS1 Series

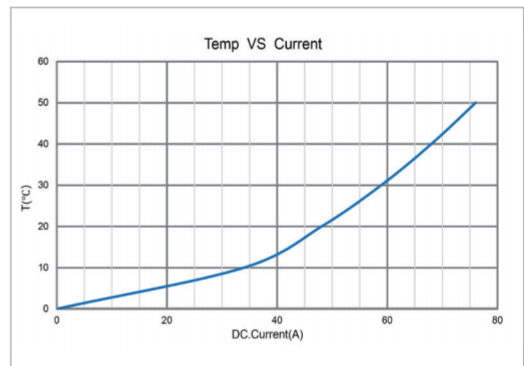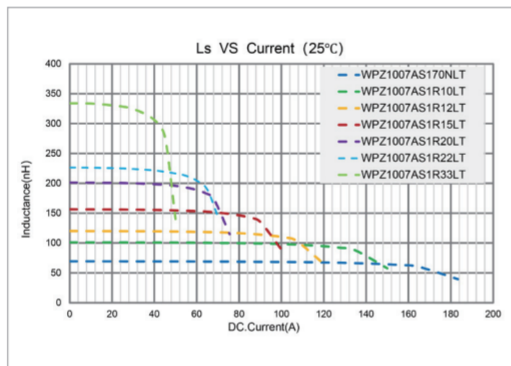

WPZ1007CS1 Series

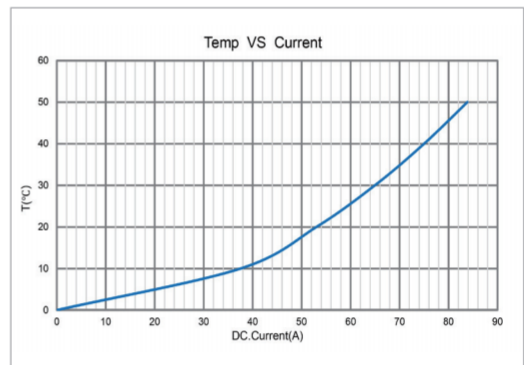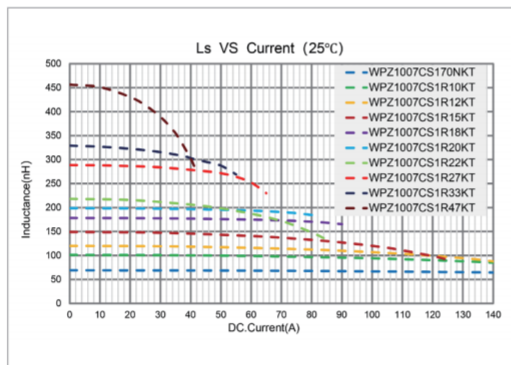



WPZ10087S1 Series

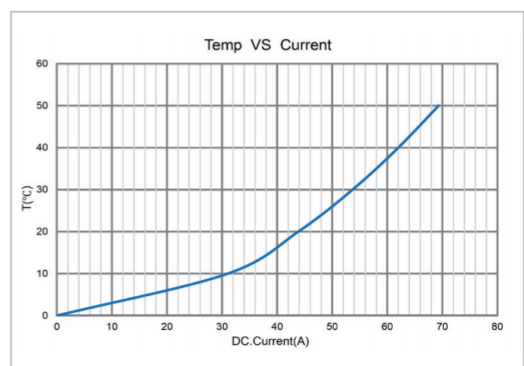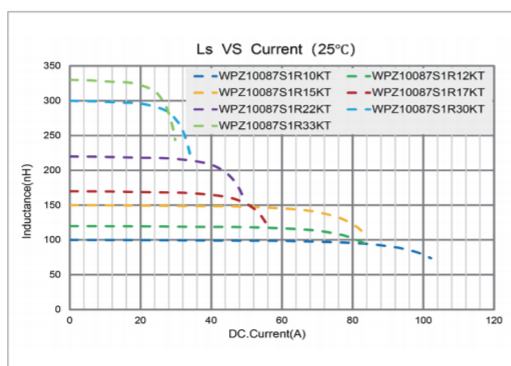



电气特性

Typical Electrical Characteristics



WPZ10087B1 Series

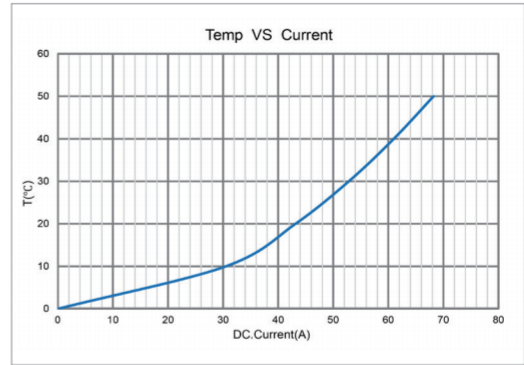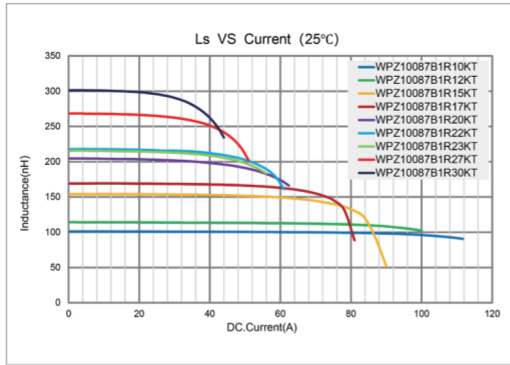



WPZ10088S1 Series

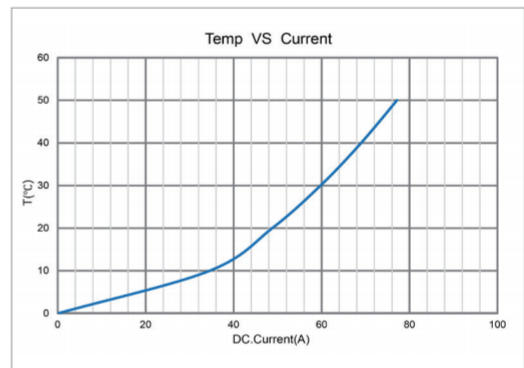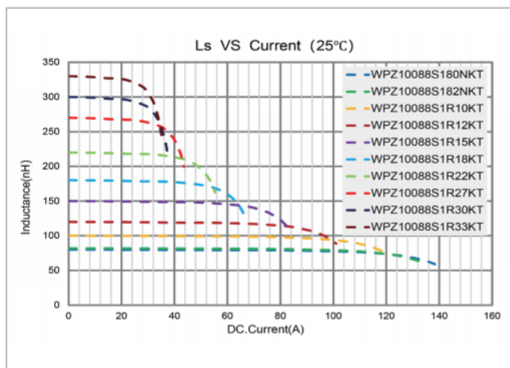

WPZ1104AS1 Series

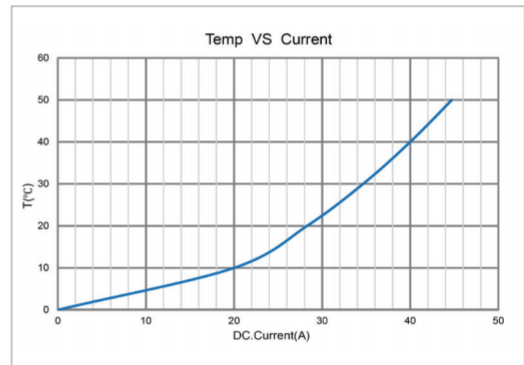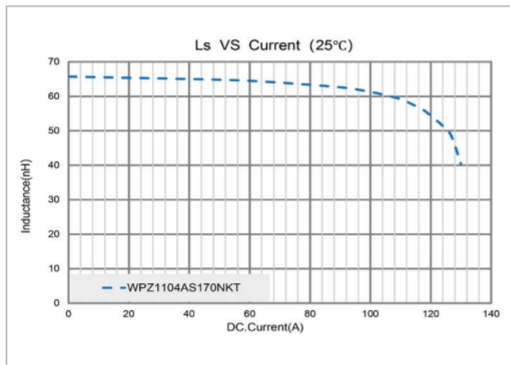



WPZ11068S1 Series

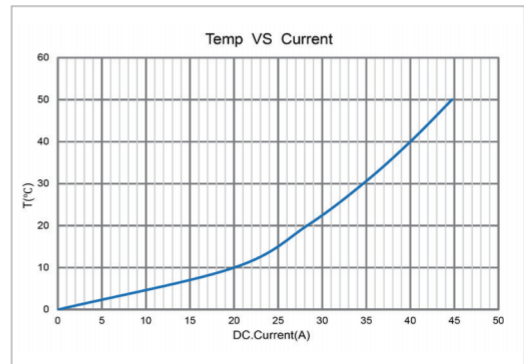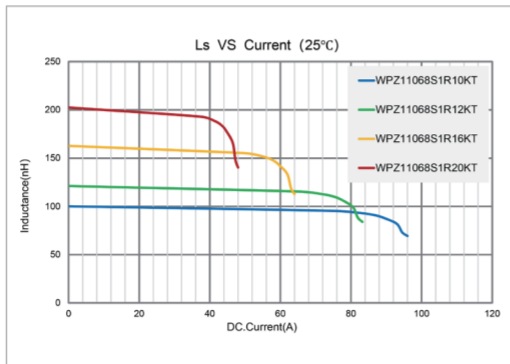



电气特性

Typical
Electrical
Characteristics



WPZ11077S1 Series

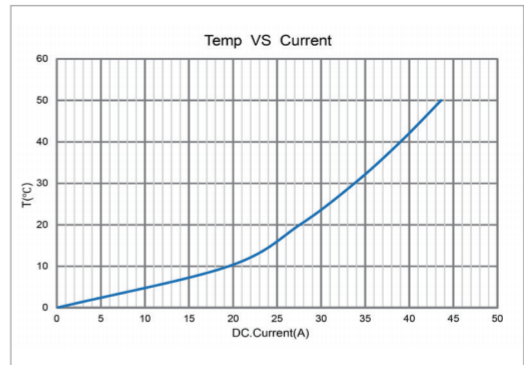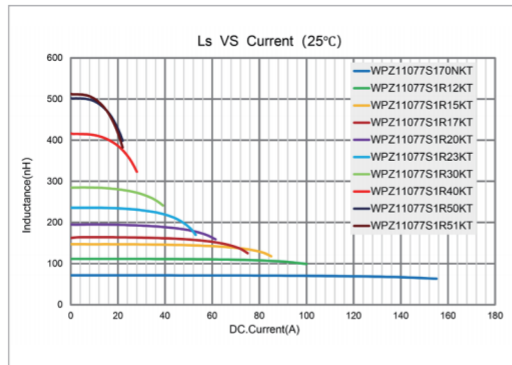



WPZ11119S1 Series

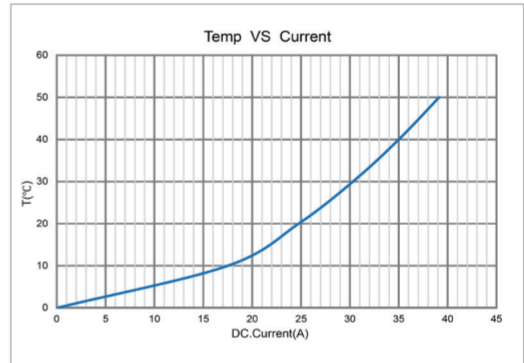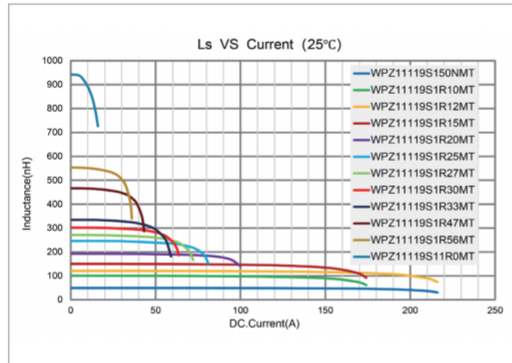

WPZ12088S1 Series

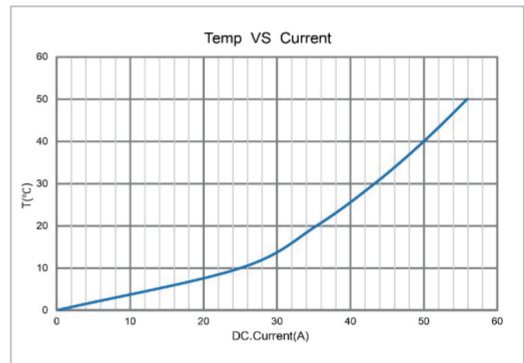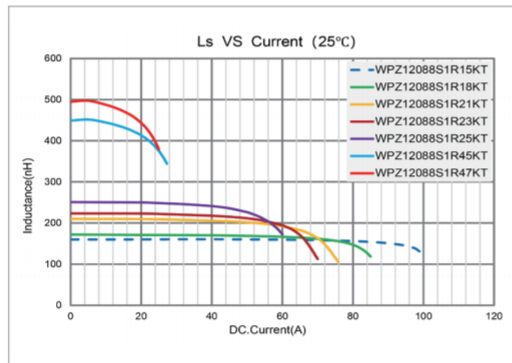



WPZ13083S1 Series

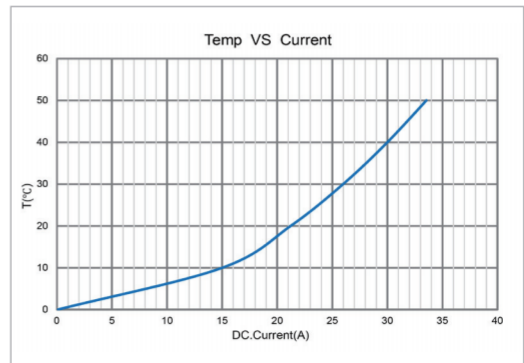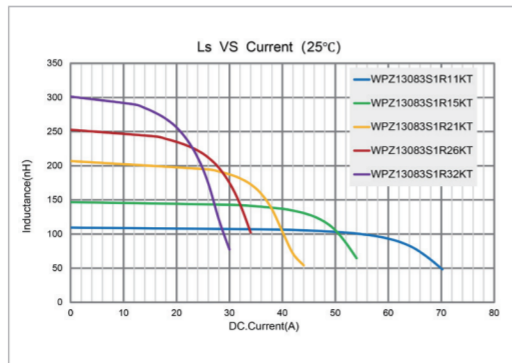



电气特性

Typical
Electrical
Characteristics



WPZ13138S1 Series

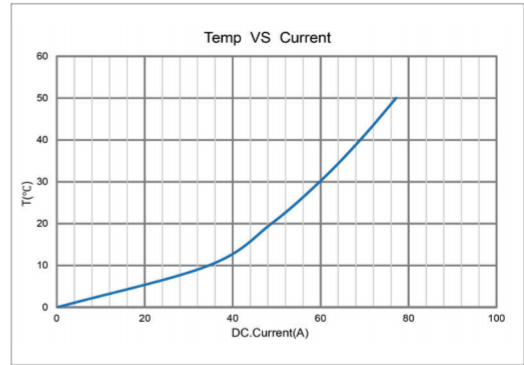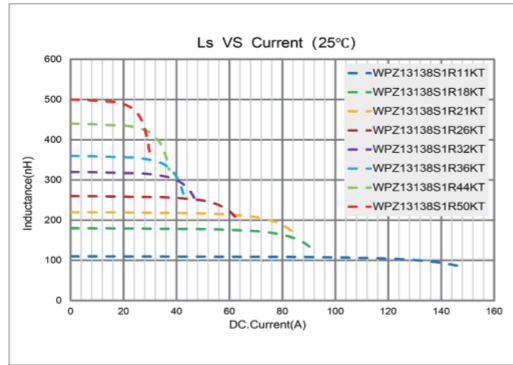



WPZ06065S1 Series

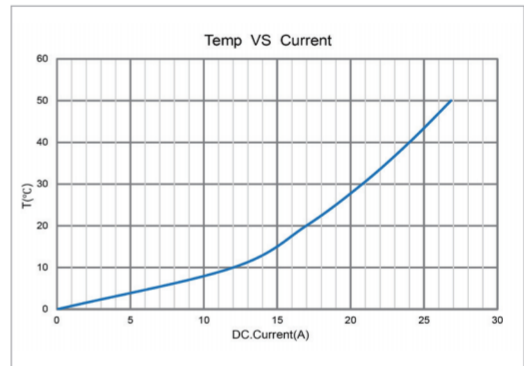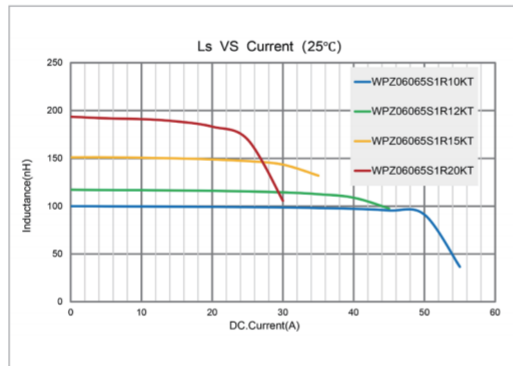

WPZ10103S1 Series

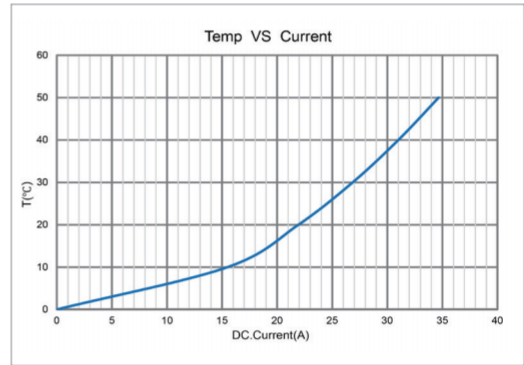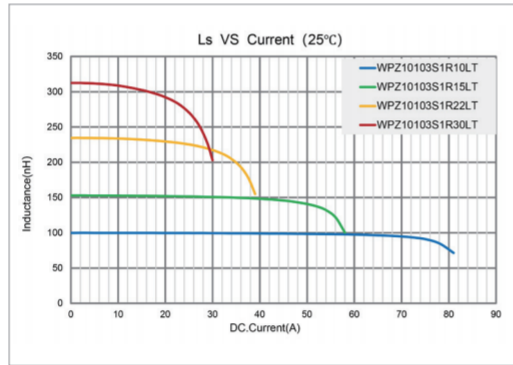



WPZ10106S1 Series

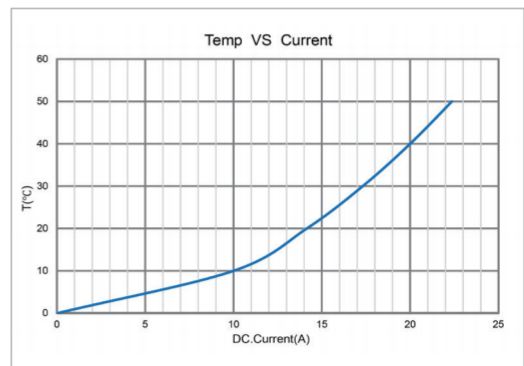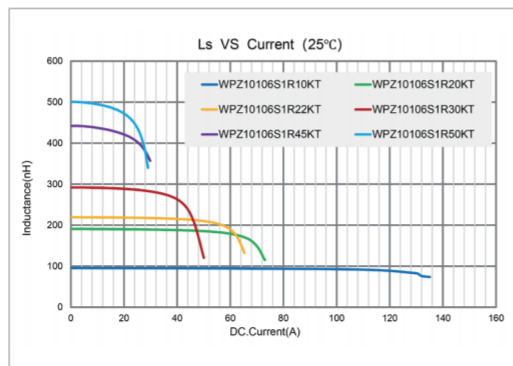



电气特性

Typical
Electrical
Characteristics



WPZ16123S1 Series

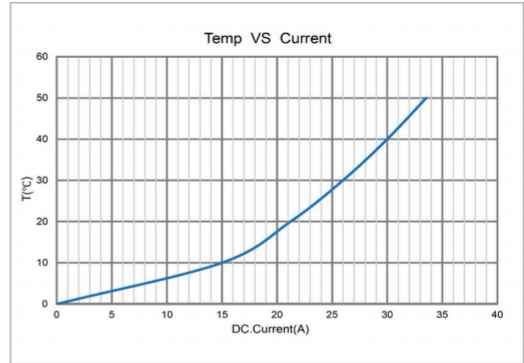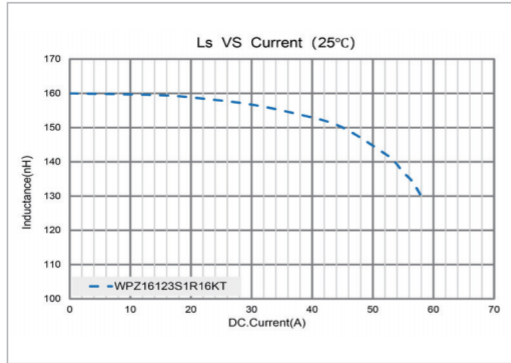



WPZ18113S1 Series

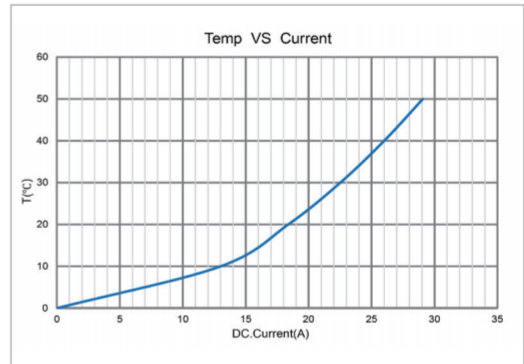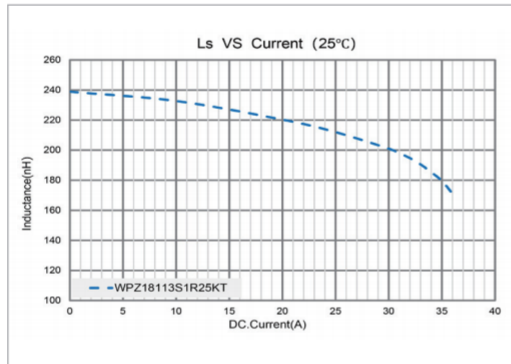

WPZ0906AS2 Series

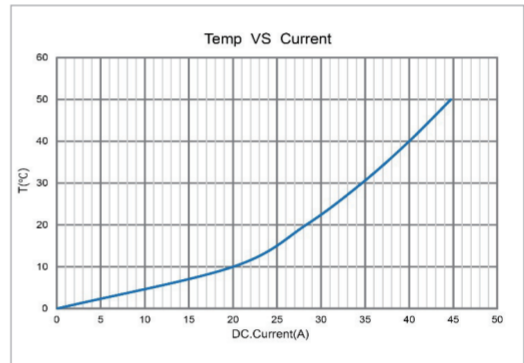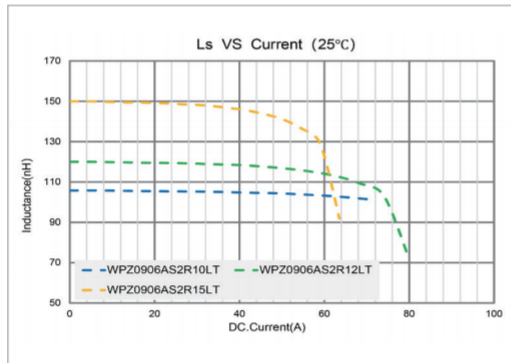



WPZ0906BS2 Series

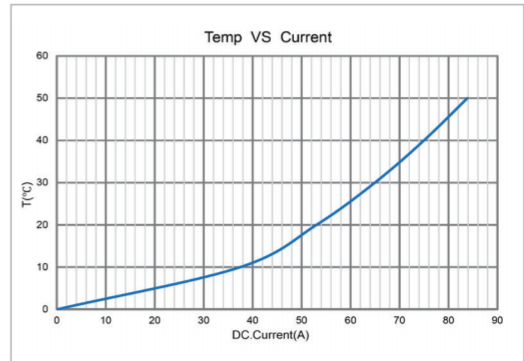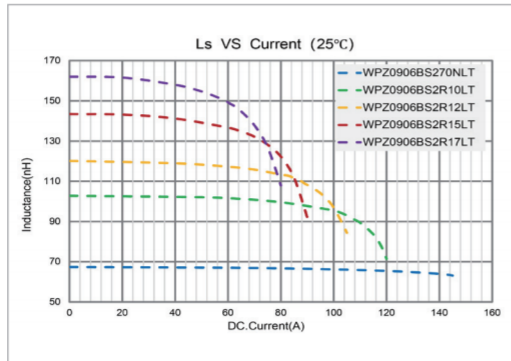



电气特性

Typical
Electrical
Characteristics



WPZ1006CS2 Series

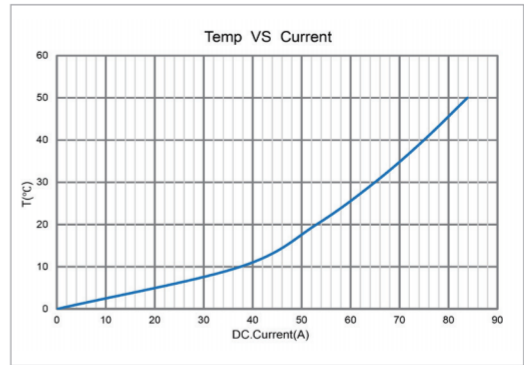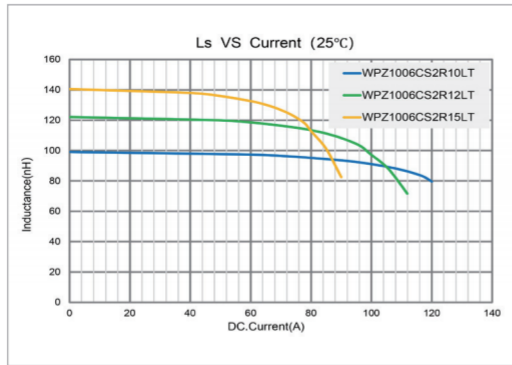



WPZ1205CS2 Series

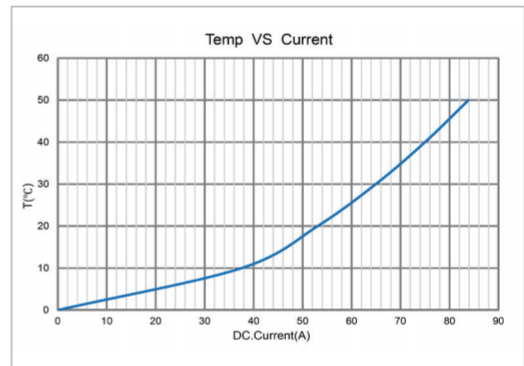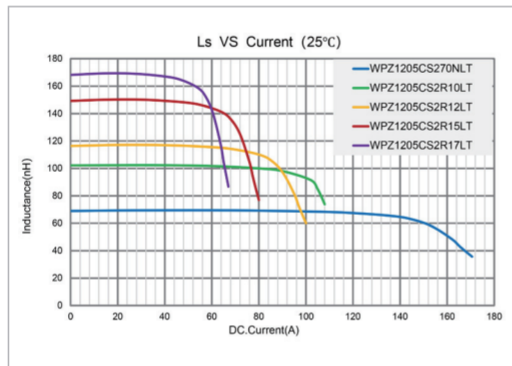

WPZ1206AB2 Series

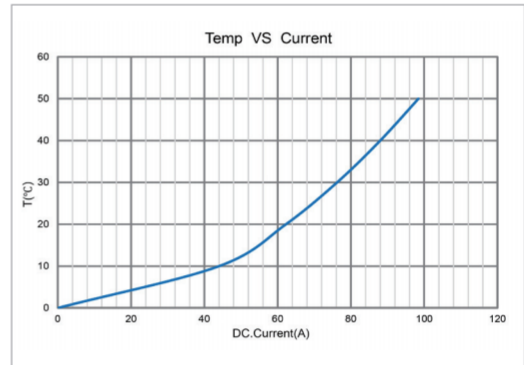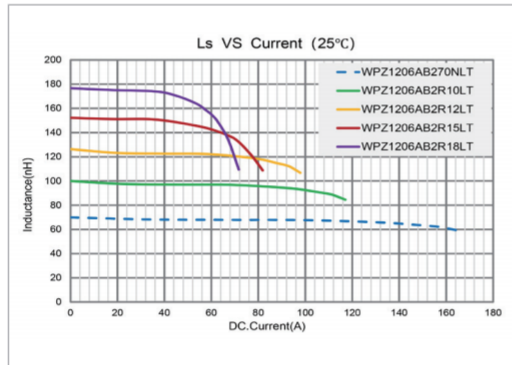

WPZ1206BS2 Series

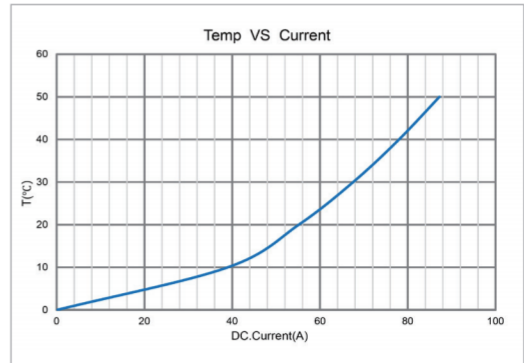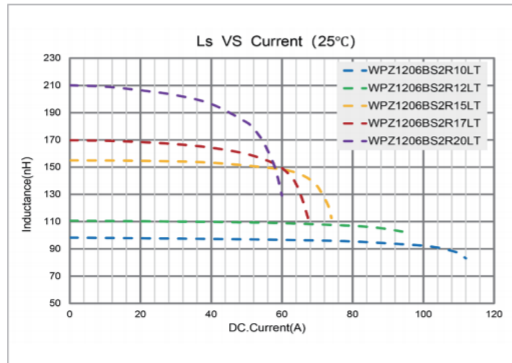

电气特性

Typical
Electrical
Characteristics

WPZ1206CS2 Series

