

Features

- Size Design $\Phi 8 \times 7\text{mm}$
- High Current Handling Capability 5,000A @ 8/20 μs
- Low Capacitance and Insertion Loss
- Fast Response and Long Service Life
- Reliable to Protect Electrostatic Surge
- Moisture sensitivity level: Level 1
- Current Limiting, available 1-40A @680VAC


Application Information

- AC Power

Exterior



Package (Top View)



Agency Approvals

Icon	Description
RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003
	Mean lead free
	Compliance with UL1449, Certificated E337906

Schematic Symbol



Electrical Parameter

DC Breakdown Voltage ^{1) 2)}	100V/s	>480	V
Impulse Spark-over Voltage	at 1kV/ μs	for 99 % of measured values ≤ 1500	V
Impulse Discharge Current ³⁾	8/20 μs ± 5 times	5	KA
Arc Voltage	at 1A	~ 40	V
Insulation Resistance	DC=100V	≥ 1	G Ω
Capacitance at 1 MHz	V _{DC} =0.5V	≤ 1.5	pF
Weight		~ 1.26	g
Operating and storage Temperature		-40-125	$^{\circ}\text{C}$
Marking		Bencent Logo 600	

1) At delivery AQL 0.65 level II ISO 2859

2) In ionized mode

3) Terms and current waveforms in accordance with ITU-T Rec. K. 12; IEC 61643-21

Open Characteristic

Voltage Rating(V)	680	680	680	680	680	680	680
Ampera Rating(A)	1.2	2	6	12	24	30	40
Open Time(S) Max.	5	4	2	1.5	1	1	1

Part Numbering System

BGO 6000 A05 -L C 2

(1) (2) (3) (4) (5) (6)

(1)Bencent Open GDT

(2)Rated DC Breakdown Voltage, 6000: $600 \times 10^0 = 600V$

(3)Surge Rating, A05: $8/20 \mu s$ 5KA

(4)Structure, L: Axial Lead

(5)Dimension, C: $\Phi 8 \times 7mm$

(6)Pin Number, 2pin

Product Characteristics

Lead Material	Copper & Irio-nickel
Body Material	Ceramics Iron-nickel electrode
Terminal Finish	100% Matte-Tin Plated

Environmental Reliability Characteristics


Testing items	Technical standards
High Temperature Storage Test	Temperature: 125℃ Time:2H
Low Temperature Storage Test	Temperature: -40℃ Time:2H
Thermal Shock	Temperature:-40-125℃ Cycle:50
Vibration	Frequency: 10-500Hz Amplitude: 0.15mm Time: 45mins
Resistance of soldering heat	Temperature: $260 \pm 5^\circ C$ Time of dip soldering: 10s, 1time

Note: Up-screen program can be specified by customer's request via contacting Bencent service

Solderability Test

Solderability	Solder Pot Temperature:	$245^\circ C \pm 5^\circ C$
	Solder Dwell Time:	4-6 seconds


Product Dimensions

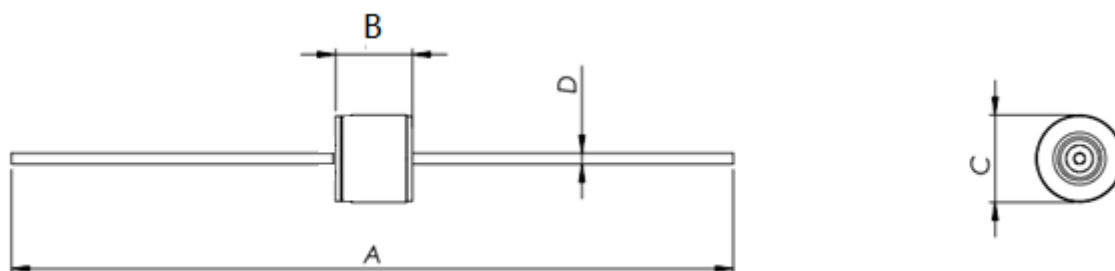



REF	Mm	inch
A	64 ± 4	2.441 ± 0.157
B	7 ± 1.4	0.276 ± 0.055
C	$\Phi 8 \pm 0.2$	$\Phi 0.315 \pm 0.008$
D	$\Phi 0.8 \pm 0.1$	$\Phi 0.031 \pm 0.004$

Wave Soldering Profile

Wave Soldering Condition		Pb-Free assembly
Pre Heat	Temperature Min	100°C
	Temperature Max	150°C
	Time (min to max)	60 – 180 secs
Solder Pot Temperature		270°C Max
Solder Dwell Time		2-5 seconds

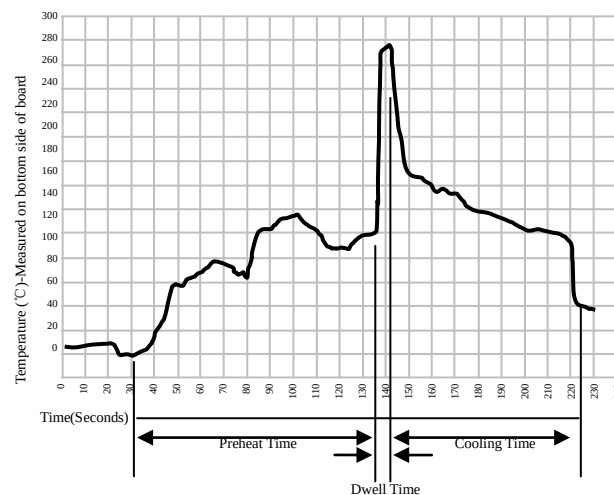

Package Reel Information

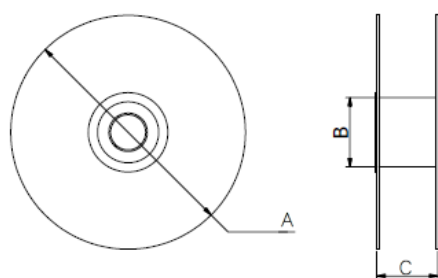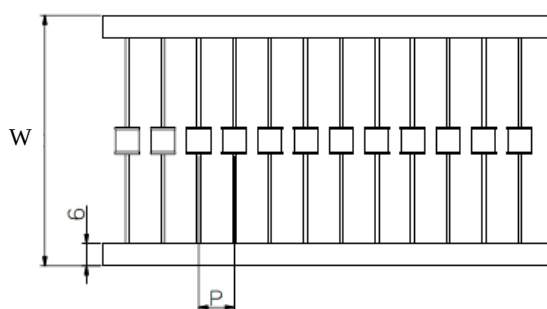

REF	mm	inch
W	65±3	2.559±0.118
P	10±1	0.394±0.039
A	Φ340±2	Φ13.386±0.079
B	Φ83±2	Φ3.268±0.079
C	73±3	2.874±0.118

OUTLINE	REEL (PCS)	PER CARTON (PCS)	CARTON SIZE(mm)		
			L	W	H
TAPING	700	4200	480	350	360