

Transient Voltage Suppressor

Version: A0 2022-11-10

Features

- IEC 61000-4-2(ESD) $\pm 30\text{KV}$ (air), $\pm 30\text{KV}$ (contact)
- IEC61000-4-5(Lightning) 9A (8/20 μS)
- IEC61000-4-4(EFT)40A(5/50ns)
- 171Watts peak pulse power (tp=8/20 μS)
- Low clamping voltage
- Moisture sensitivity level: Level 1
- Weight 5.0 mg
- Small package: SOD323

Exterior




SOD323

Application information

- Smart Phone and Tablet PC
- TV and Set Top Box
- Wearable Devices
- PDA


Package (top view)



Agency Approvals

Icon	Description
RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003
	Mean lead free

Schematic

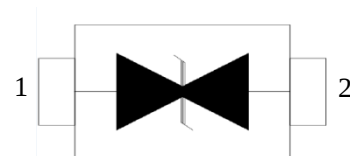

Part Number and Electrical Parameter

Part Number	$I_{\text{DRM}}@V_{\text{DRM}}$		$V_{\text{BR}}^{①}@I_{\text{R}}$		$V_{\text{C}}@I_{\text{pp}}^{②}$		$V_{\text{C}}@I_{\text{pp}}^{②}$		$R_{\text{DYN}}@$ TLP ^③	$V_{\text{C}}@I_{\text{pp}}$ TLP ^③		$C_{\text{O}}^{④}$
	μA	V	V	mA	V	A	V	A	Ω	V	A	pF
	MAX		MIN		MAX		MAX		TYP	TYP		TYP
BV-D305ZCK	1	5.0	5.6	1	11.6	5.0	19.0	9.0	0.24	12	16	15

Absolute maximum ratings measured at $T = 25^{\circ}\text{C}$ RH = 45%-75% (unless otherwise noted).

① V_{BR} is measured at $I_{\text{R}}=1\text{mA}$

② Surge Waveform: 8/20 μS .

③ TLP parameter: $Z_0 = 50\Omega$, $t_p = 100\text{ns}$, $t_r = 1\text{ns}$, R_{DYN} is calculated from 4A to 16A

④ Off-state capacitance is measured in $V_{\text{DC}}=0\text{V}$, $V_{\text{RMS}}=0.3\text{V}$, $f=1\text{MHz}$

Transient Voltage Suppressor

Version: A0 2022-11-10

Part Numbering System

Mark

BV D3 05 Z C K
(1) (2) (3) (4) (5) (6)


- (1) Bencent Transient Voltage Suppressor
- (2) Package: SOD323
- (3) Off-state Voltage: 5V
- (4) Normal Capacitance
- (5) Bi-directional
- (6) Bencent internal code



5K: Part Number

V-I Curve



Parameters	Definition
V_C	Clamping voltage
I_{PP}	Surge waveform 8/20 μ s
V_{DRM}	Stand-off Voltage
V_{BR}	Breakdown Voltage
I_{DRM}	Reverse Leakage Current
I_R	Test current
V_{SB}	Snapback voltage
I_{SB}	Test current
P_{pp}	Peak Pulse Power Dissipation

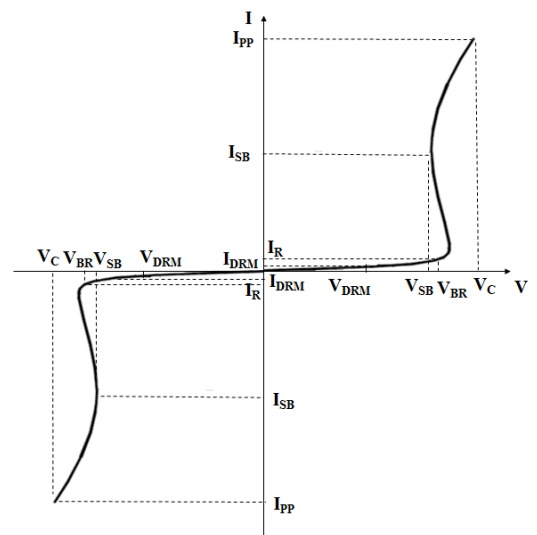


Thermal Considerations

symbol	Parameter	Value	Unit
T_J	Operating Junction Temperature Range	-40 to +125	°C
T_S	Storage Temperature Range	-55 to +150	°C


Typical Characteristics

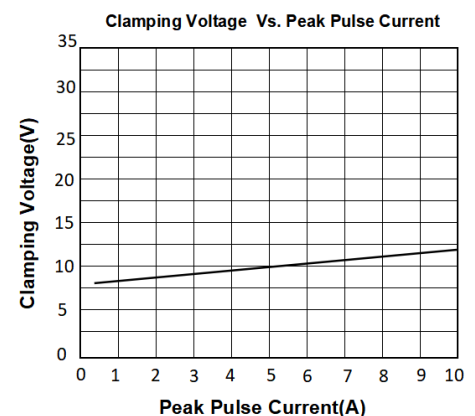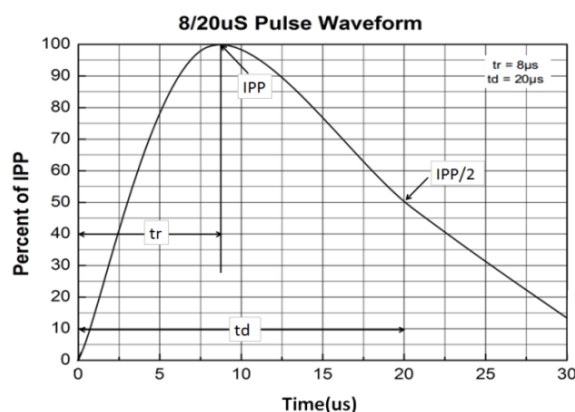

TLP IV curve Pin1 to Pin2

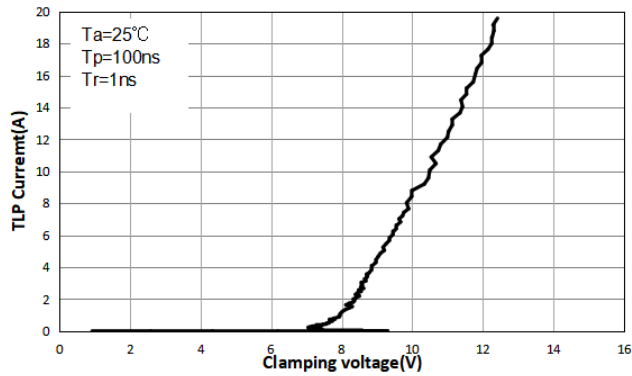

TLP IV curve Pin2 to Pin1

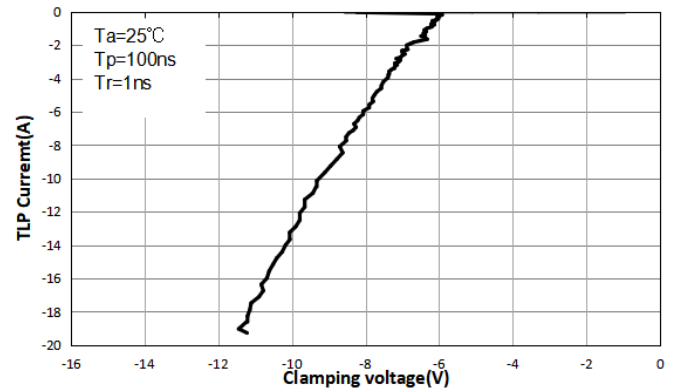


Environmental Characteristics

Testing items	Technical standards
High temperature Reverse Bias Test	Temperature: $150\pm3^{\circ}\text{C}$ Bias= $80\%V_{\text{DRM}}$ Time:168H
High Temperature Life Test	Temperature: 150°C Time:168H
High-low Temperature Cycle test	Temperature: From -40°C to 125°C Dwell time : 30min,10cycles
High Temperature &High Humidity Test	Temperature: 85°C Humidity:85% Time:168H
Pressure cooker Tes	Temperature: 121°C , 2atm. Humidity:100% Time:24H
Resistance of soldering heat	Temperature: $260\pm5^{\circ}\text{C}$ Time of dip soldering: 10s, 3times

Note: The above testing items can be specified by customer's special request

Product Dimensions

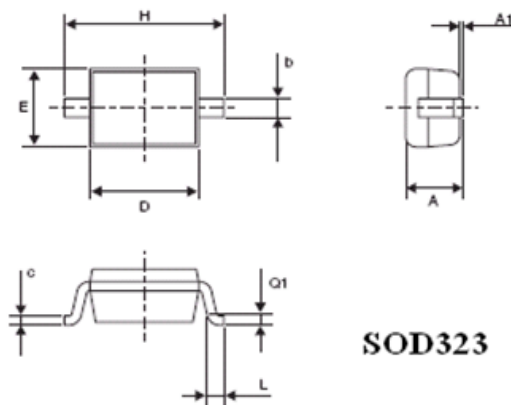


SOD323

REF	mm	inch
A	1.17(max)	0.046(max)
A1	0.10(max)	0.004(max)
b	0.34 ± 0.10	0.013 ± 0.0039
c	0.17 ± 0.08	0.007 ± 0.0032
D	1.66 ± 0.14	0.065 ± 0.0055
E	1.28 ± 0.17	0.050 ± 0.0067
H	2.5 ± 0.2	0.098 ± 0.0079
L	0.28 ± 0.18	0.011 ± 0.0071
Q1	0.25 ± 0.15	0.010 ± 0.0059

Transient Voltage Suppressor

Version: A0 2022-11-10


Recommended Soldering Pad

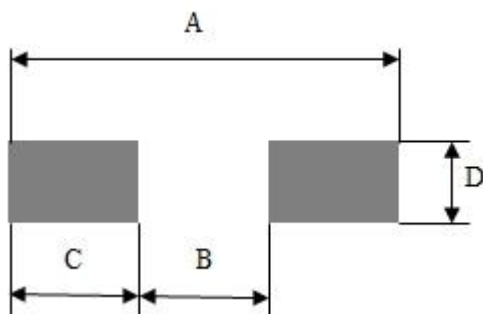


REF	mm	inch
A	3.2	0.126
B	1.08	0.043
C	1.06	0.042
D	0.54	0.021

Reflow Profile

Reflow Condition		Pb-Free assembly
Pre Heat	Temperature Min	150°C
	Temperature Max	200°C
	Time (min to max)	60 – 180 secs
Average ramp up rate (Liquid) T _{amp} (T _L) to peak		3°C/s max
T _{S(max)} to T _L - Ramp-up Rate		3°C/s max
Reflow	- Temperature (T _L) (Liquid)	217°C
	- Temperature (T _L)	60 – 150 secs
Peak Temperature (T _P)		260+0/-5 °C
Time within 5°C of actual peak Temperature (T _P)		30secs
Ramp-down Rate		6°C/s max
Time 25°C to peak Temperature (T _P)		8 mins max.
Do not exceed		260°C

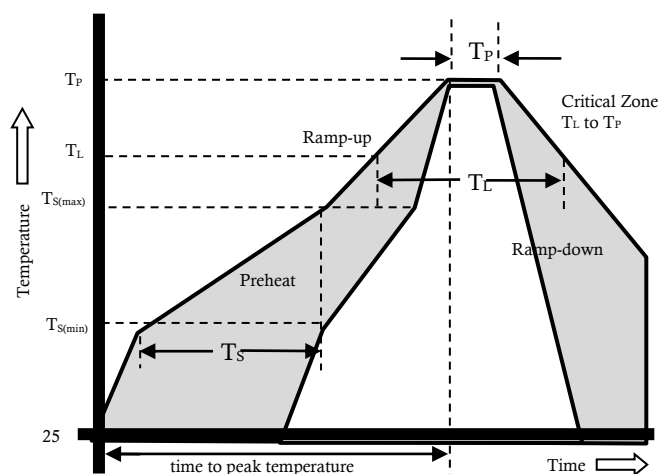

Package Reel Information

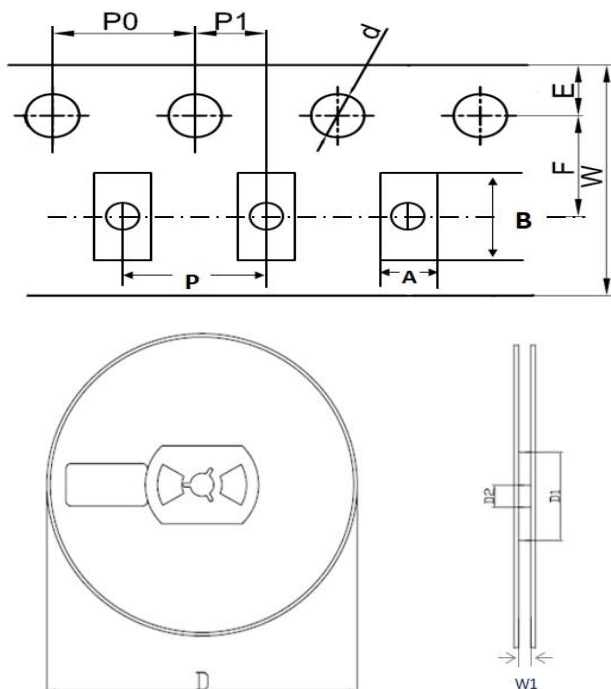

REF	mm	inch
A	1.46+/-0.20	0.057+/-0.008
B	3.10+/-0.30	0.122+/-0.012
d	1.50+0.1/-0	0.059+0.004/-0
D	178.00+/-2.00	7.008+/-0.079
D1	55.00+/-3.00	2.165+/-0.118
D2	13.00+/-0.50	0.512+/-0.020
E	1.75+/-0.10	0.069+/-0.004
F	3.50+/-0.20	0.138+/-0.008
P	4.00+/-0.20	0.157+/-0.008
P0	4.00+/-0.20	0.157+/-0.008
P1	2.00+/-0.20	0.079+/-0.008
W	8.00+/-0.20	0.315+/-0.008
W1	8.60+/-1.00	0.339+/-0.039

OUTLINE	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)	CARTON SIZE(mm)		
				L	W	H
TAPING	3,000	90,000	178	380	220	205