

Transient Voltage Suppressor**Features**

- IEC 61000-4-2(ESD)±30KV(air), ±30KV(contact)
- IEC61000-4-5(Lightning) 100A (8/20uS)
- IEC61000-4-4(EFT) 40A (5/50nS)
- 1100Watts peak pulse power (tp=8/20μS)
- Low clamping voltage
- Weight approx. 1.0 mg
- Moisture sensitivity level: Level 1
- Small package: DFN1006-2L

Exterior


DFN1006-2L

Application information

- Smart Phone and Tablet PC
- TV and Set Top Box
- Wearable Devices
- PDA

Package (top view)**Agency Approvals**

Icon	Description
RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003
	Mean lead free

Schematic**Part Number and Electrical Parameter**

Part Number	$I_{DRM}@V_{DRM}$		$V_{BR}^{①}@I_R$		$V_C@I_{pp}^{②}$		$V_C@I_{pp}^{②}$		$R_{DYN}@TLP^{③}$	$V_C@I_{pp} TLP^{③}$		$C_o^{④}$
	μA	V	V	mA	V	A	V	A	Ω	V	A	pF
	MAX		MIN		MAX		MAX		TYP	TYP		TYP
BV-FA05ZCH	0.5	5	5.3	1	8	1	11	100	0.006	6	16	200

Absolute maximum ratings measured at T= 25°C RH = 45%-75% (unless otherwise noted).

① V_{BR} is measured at $I_R=1mA$

② Surge Waveform: 8/20μS.

③ TLP parameter: $Z_0 = 50\Omega$, $t_p = 100ns$, $t_r = 1ns$, R_{DYN} is calculated from 4A to16A

④ Off-state capacitance is measured in $V_{DC}=0V$, $V_{RMS}=0.3V$, $f=1MHZ$

Transient Voltage Suppressor

Version: A0 2022-09-01

Part Numbering System

BV FA 05 Z C H
(1) (2) (3) (4) (5) (6)

- (1) Bencent Transient Voltage Suppressor
- (2) Package:DFN1006-2L
- (3) Off-state Voltage: 5V
- (4) Normal Capacitance
- (5) Bidirectional
- (6) Bencent internal code


Mark





V5: Part Number



V-I Curve

Parameters	Definition
V_C	Clamping voltage
I_{PP}	Surge waveform 8/20us
V_{DRM}	Stand-off Voltage
V_{BR}	Breakdown Voltage
I_{DRM}	Reverse Leakage Current
I_R	Test current
V_{SB}	Snapback voltage
I_{SB}	Test current
P_{pp}	Peak Pulse Power Dissipation

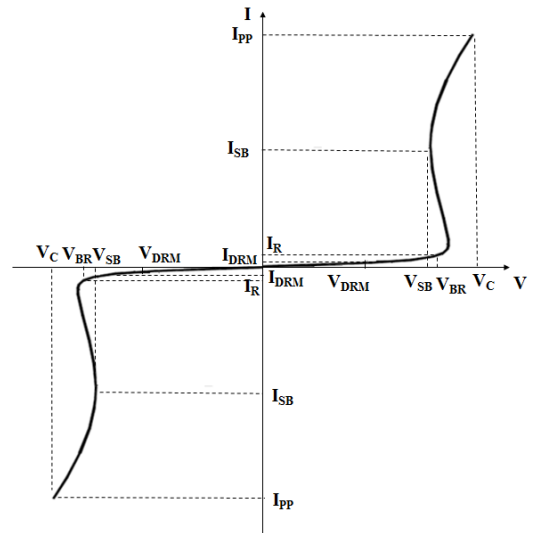

Typical Characteristics

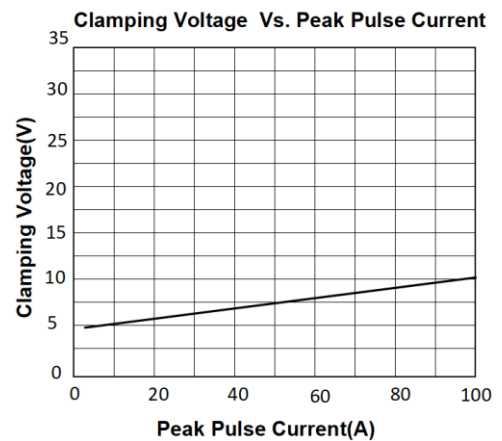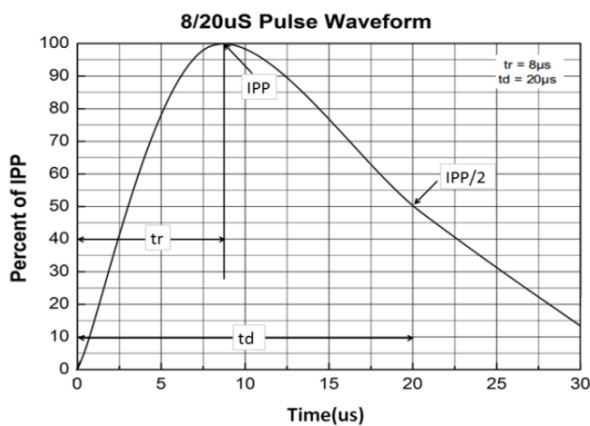

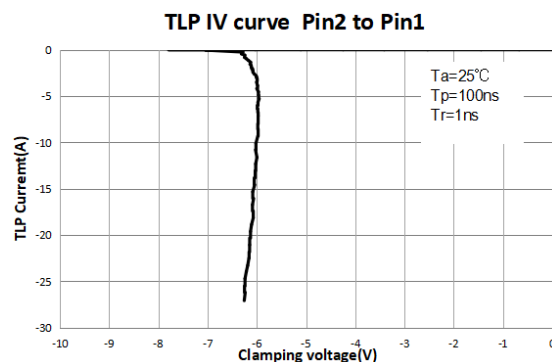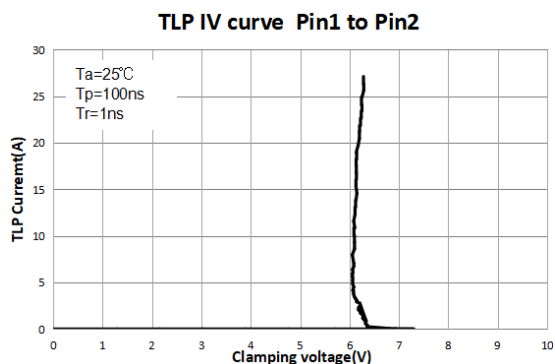

Thermal Considerations

symbol	Parameter	Value	Unit
T_J	Operating Junction Temperature Range	-55 to +125	°C
T_S	Storage Temperature Range	-55 to +150	°C

Environmental Characteristics


Testing items	Technical standards
High temperature Reverse Bias Test	Temperature: 125±3°C Bias=80%V _{DRM} Time:168H
High Temperature Life Test	Temperature: 150°C Time:168H
High-low Temperature Cycle test	Temperature: From -55°C to125°C Dwell time : 30min,10~100cycles
High Temperature &High Humidity Test	Temperature: 85°C Humidity:85% Time:168H
Pressure cooker Test	Temperature: 121°C , 2atm. Humidity:100% Time:24H
Resistance of soldering heat	Temperature: 260±5°C Time of dip soldering: 10s, 3times

Note: The above testing items can be specified by customer's special request

Transient Voltage Suppressor


Version: A0 2022-09-01

Product Dimensions

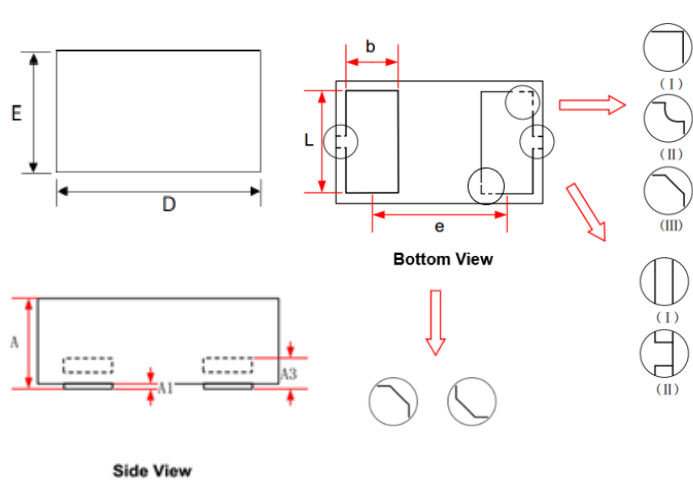

REF	mm	inch
A	0.30~0.55	0.012~0.022
A1	0~0.05	0.000~0.002
A3	0.125 REF	0.020REF
D	0.95~1.10	0.037~0.043
E	0.55~0.70	0.022~0.028
b	0.20~0.30	0.008~0.012
e	0.65BSC	0.026BSC
L	0.45~0.55	0.018~0.022

Recommended Soldering Pad

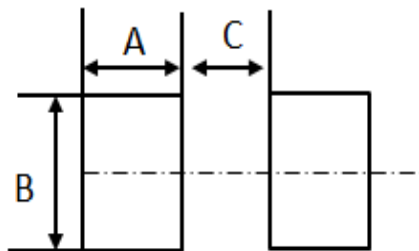


REF	mm	inch
A	0.35	0.014
B	0.60	0.024
C	0.35	0.014

Transient Voltage Suppressor


Version: A0 2022-09-01

Reflow Profile

Reflow Condition		Pb-Free assembly
Pre Heat	Temperature Min	150°C
	Temperature Max	200°C
	Time (min to max)	60 – 180 secs
Average ramp up rate (Liquid)		3°C/s max
Tamp (T _L) to peal		
T _S (max) to T _L - Ramp-up Rate		3°C/s max
Reflow	- Temperature (T _L) (Liquid)	217°C
	- Temperature (T _L)	60 – 150 secs
Peak Temperature (T _P)		260+0/-5 °C
Time within 5°C of actual peak Temperature (T _P)		30secs
Ramp-down Rate		6°C/s max
Time 25°C to peak Temperature (T _P)		8 mins max.
Do not exceed		260°C

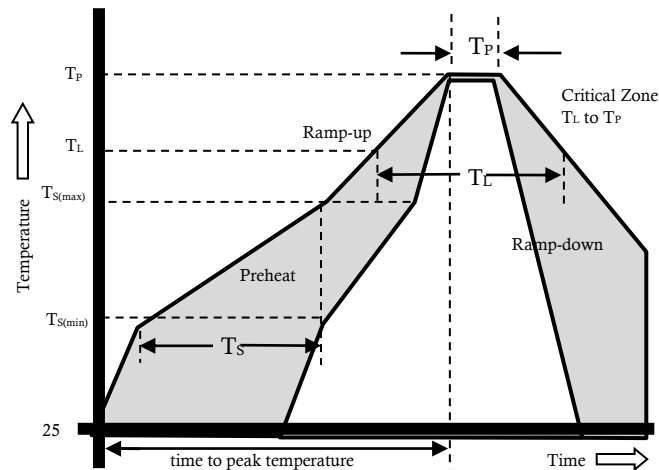

Package Reel Information

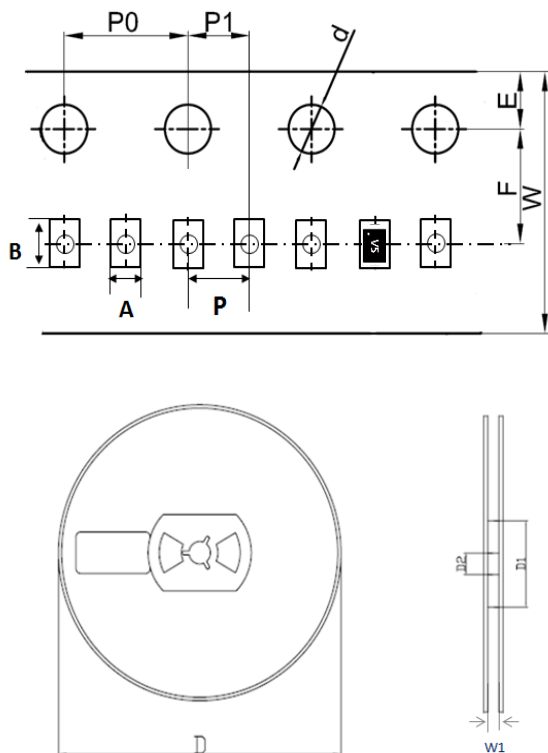

REF	mm	inch
A	0.70+/-0.05	0.028+/-0.002
B	1.15+/-0.05	0.045+/-0.002
d	1.50+0.1/-0	0.059+0.004/-0
D	178.00+/-2.00	7.008+/-0.079
D1	55.00+/-3.00	2.165+/-0.118
D2	13.00+/-0.50	0.512+/-0.020
E	1.75+/-0.10	0.069+/-0.004
F	3.50+/-0.20	0.138+/-0.008
P	2.00+/-0.20	0.079+/-0.008
P0	4.00+/-0.20	0.157+/-0.008
P1	2.00+/-0.20	0.079+/-0.008
W	8.00+/-0.20	0.315+/-0.008
W1	9.50+/-1.00	0.374+/-0.039

OUTLINE	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)	CARTON SIZE(mm)		
				L	W	H
TAPING	10,000	300,000	178	380	220	205