

C0603X6S0J222M030BA

TDK Item Description : C0603X6S0J222MT****



Application & Main Feature

Commercial Grade (General (Up to 50V))

Series

C0603 [EIA CC0201]

Dimensions

L 0.60mm +/-0.03mm
W 0.30mm +/-0.03mm
T 0.30mm +/-0.03mm
B 0.10mm Min.
G 0.20mm Min.

Temperature Characteristic

X6S (-55 to 105 degC +/-22%)

Rated Voltage

0J (6.3Vdc)

Capacitance

2.2nF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor


5% Max.

Insulation Resistance


10Gohm Min.

AEC-Q200


Not Applicable




DC Bias Characteristic

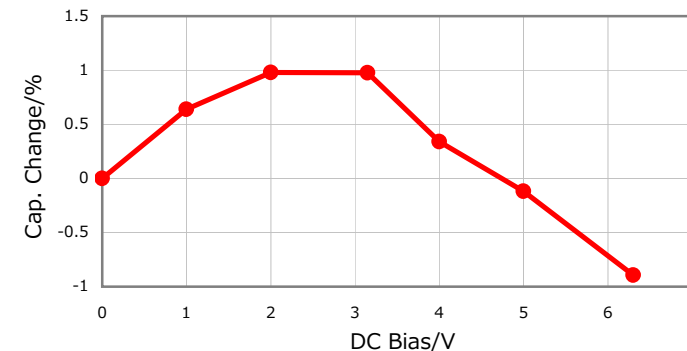


|Z|, ESR vs. Freq. Characteristics

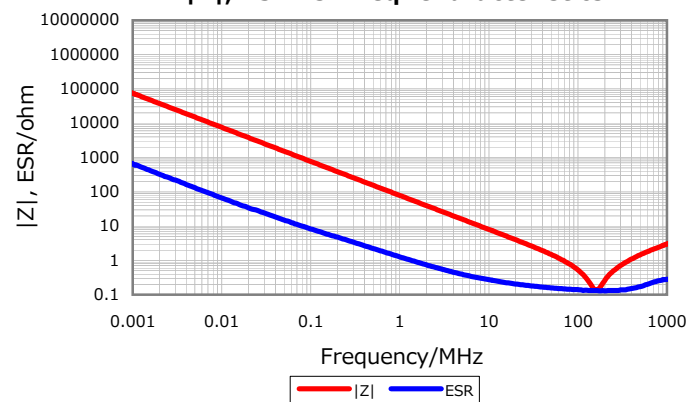


Temperature Characteristics

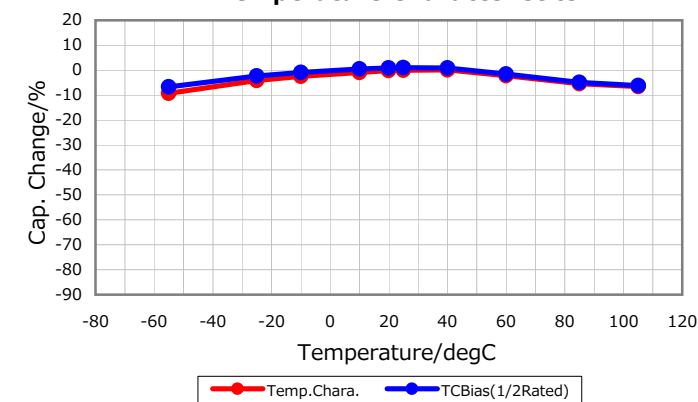

Cap. vs. Freq. Characteristic

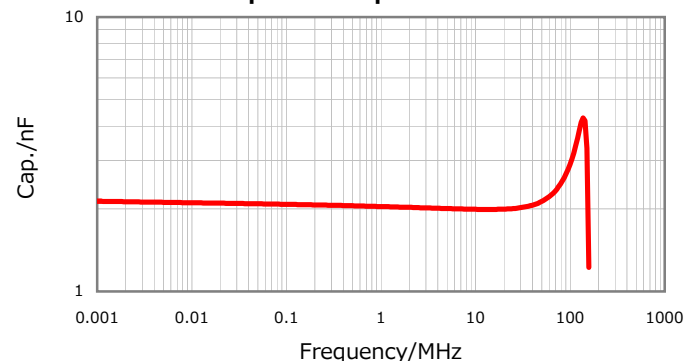

Ripple Temperature Rise Characteristics

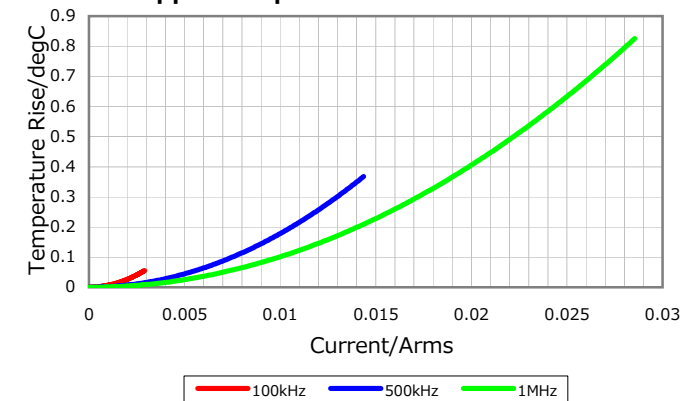

All specifications are subject to change without notice.

January 3, 2016