

C1005CH2A681J050BC

TDK Item Description : C1005CH2A681JT****




Application & Main Feature

Commercial Grade (Mid Volatage (100 to 630V))

Series

C1005 [EIA 0402]



Dimensions

L	1.00mm +/-0.05mm
W	0.50mm +/-0.05mm
T	0.50mm +/-0.05mm
B	0.10mm Min.
G	0.30mm Min.

Temperature Characteristic

CH (-55 to 85 degC 0+/-60ppm/degC)

Rated Voltage

2A (100Vdc)

Capacitance

680pF

Capacitance Tolerance

J (+/-5%)

Q Factor





1000 Min.

Insulation Resistance

10Gohm Min

AEC-Q200

Not Applicable

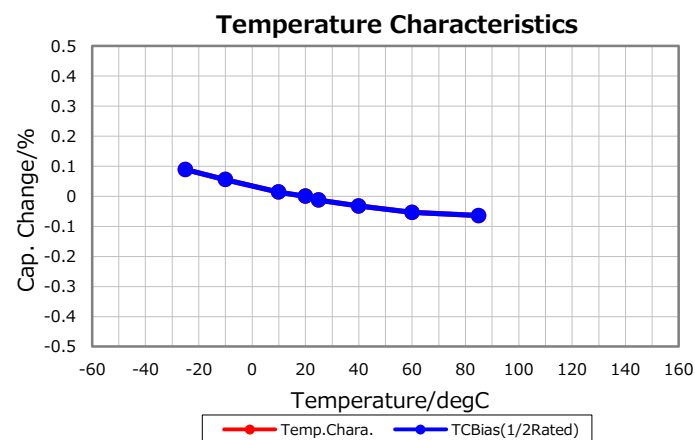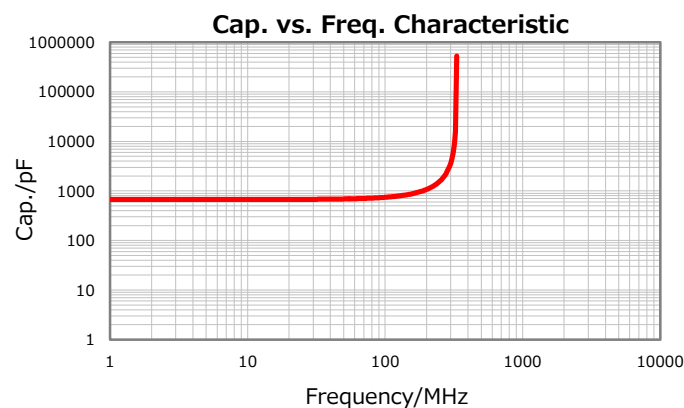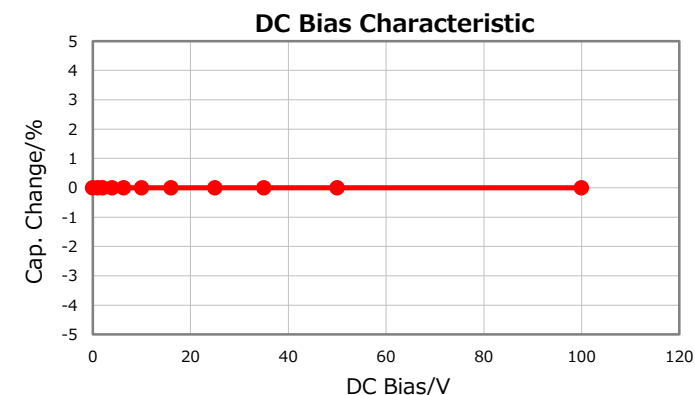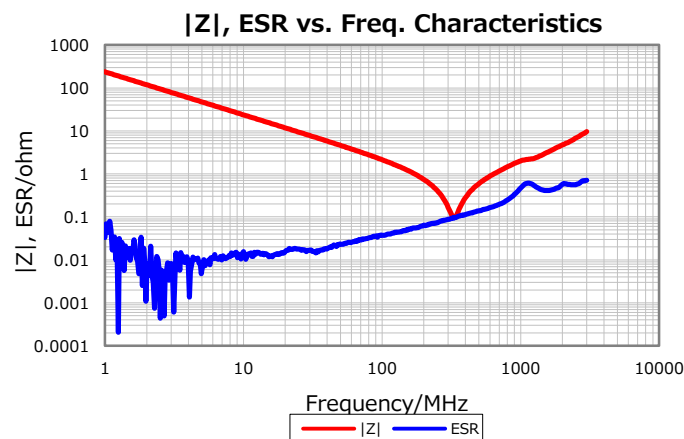

All specifications are subject to change without notice.

July 6, 2016