

C1608C0G1H562J080AE

TDK Item Description : C1608C0G1H562JT***S



Application & Main Feature

Commercial Grade (Soft Termination)

Series

C1608 [EIA 0603]

Dimensions

L	1.60mm +0.2,-0.1mm
W	0.80mm +0.15,-0.1mm
T	0.80mm +0.15,-0.1mm
B	0.20mm Min.
G	0.30mm Min.

Temperature Characteristic

C0G (-55 to 125 degC 0+/-30ppm/degC)

Rated Voltage

1H(50Vdc)

Capacitance

5.6nF

Capacitance Tolerance

J (±5%)

Q Factor


1000 Min.

Insulation Resistance


10Gohm Min

AEC-Q200


Not Applicable




**|Z|, ESR vs. Freq. Characteristics
(Simulation Data)**

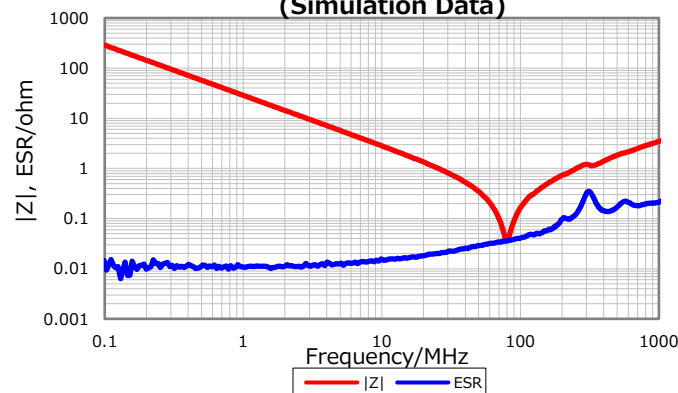


Cap. vs. Freq. Characteristic

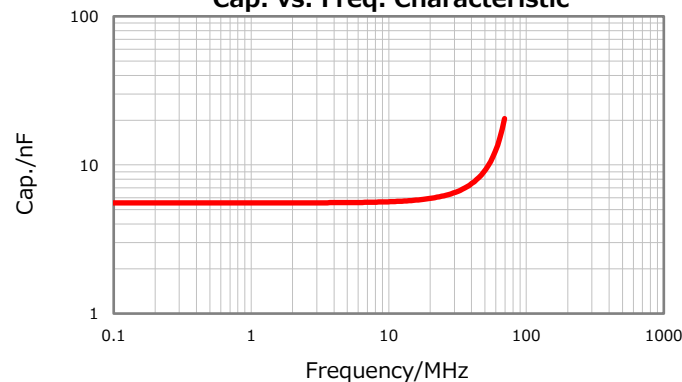


DC Bias Characteristic

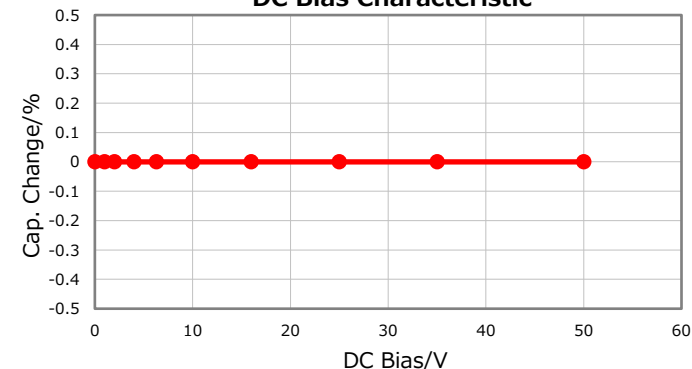

Temperature Characteristics

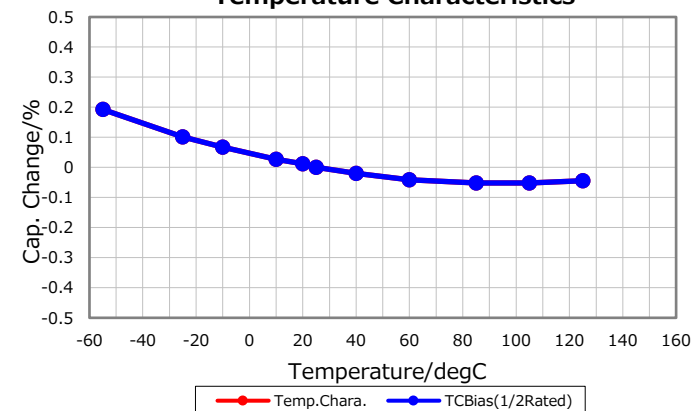

Ripple Temperature Rise Characteristics

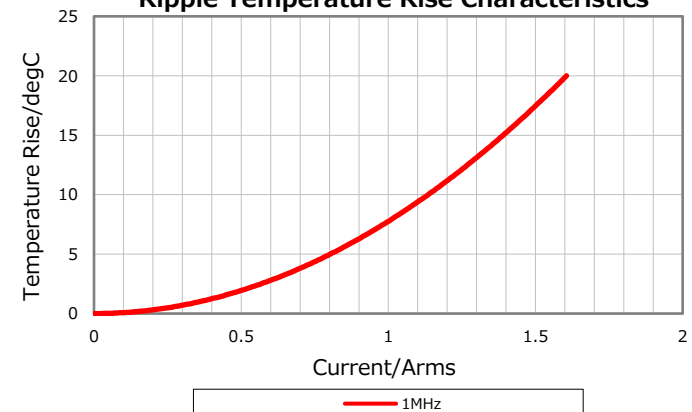

All specifications are subject to change without notice.

June 24, 2019