

C2012X6S1H474M125AB

TDK Item Description : C2012X6S1H474MT****




Application & Main Feature


Commercial Grade (General (Up to 50V))

Series

C2012 [EIA CC0805]



DC Bias Characteristic

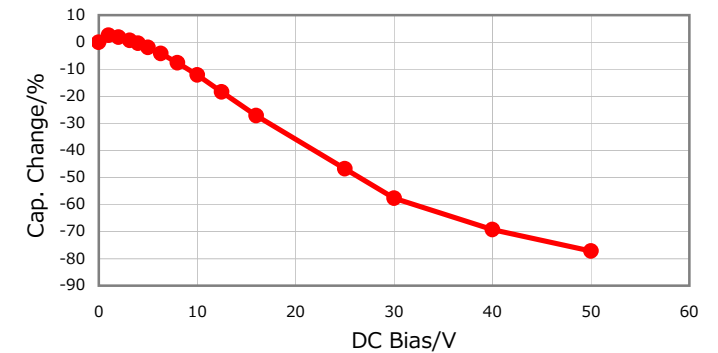

Dimensions

L 2.00mm +/-0.2mm
W 1.25mm +/-0.2mm
T 1.25mm +/-0.2mm
B 0.20mm Min.
G 0.50mm Min.

Temperature Characteristic

X6S (-55 to 105 degC +/-22%)

Rated Voltage

1H (50Vdc)

Capacitance

470nF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor

5% Max.


Insulation Resistance

1.06Gohm Min.


AEC-Q200

Not Applicable


|Z|, ESR vs. Freq. Characteristics

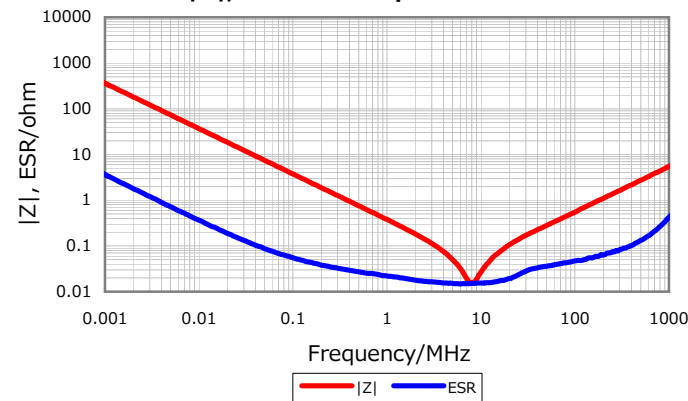


Temperature Characteristics

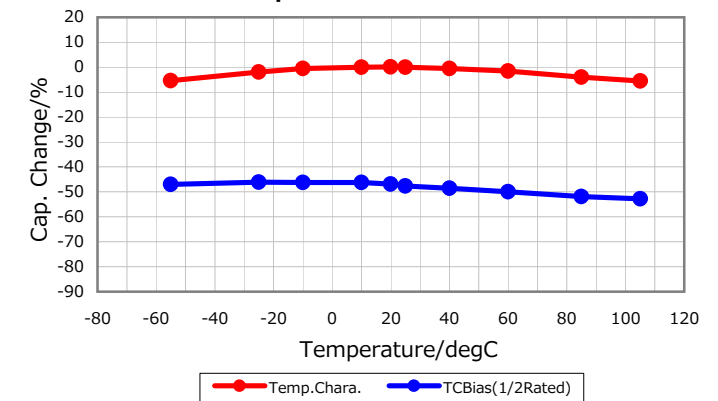

Cap. vs. Freq. Characteristic

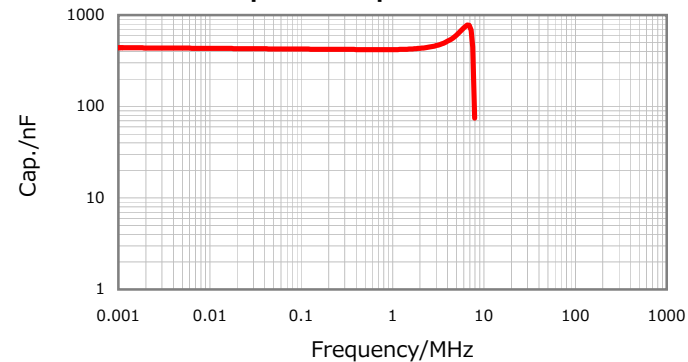

Ripple Temperature Rise Characteristics

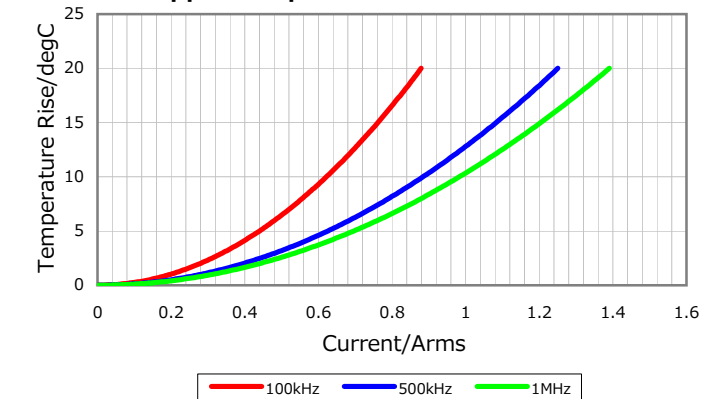

All specifications are subject to change without notice.

January 3, 2016