

C3216CH2A473J115AC

TDK Item Description : C3216CH2A473JT****




Application & Main Feature

Commercial Grade (Mid Volatage (100 to 630V))

Series

C3216 [EIA 1206]



Dimensions

L	3.20mm +/-0.2mm
W	1.60mm +/-0.2mm
T	1.15mm +/-0.15mm
B	0.20mm Min.
G	1.00mm Min.

Temperature Characteristic

CH (-55 to 85 degC 0+/-60ppm/degC)

Rated Voltage

2A (100Vdc)

Capacitance

47nF

Capacitance Tolerance

J (+/-5%)

Q Factor





1000 Min.

Insulation Resistance

10Gohm Min

AEC-Q200

Not Applicable

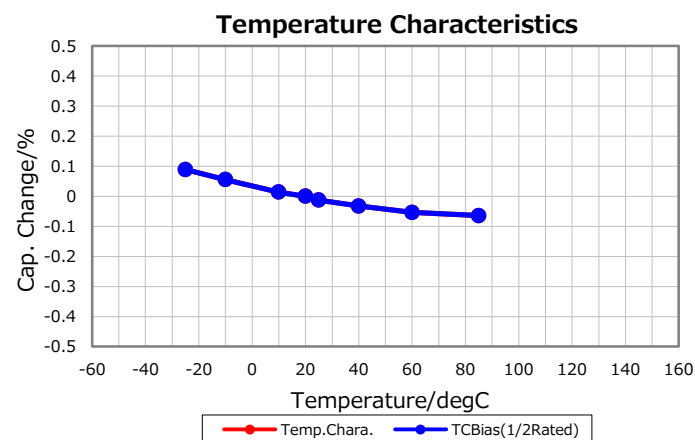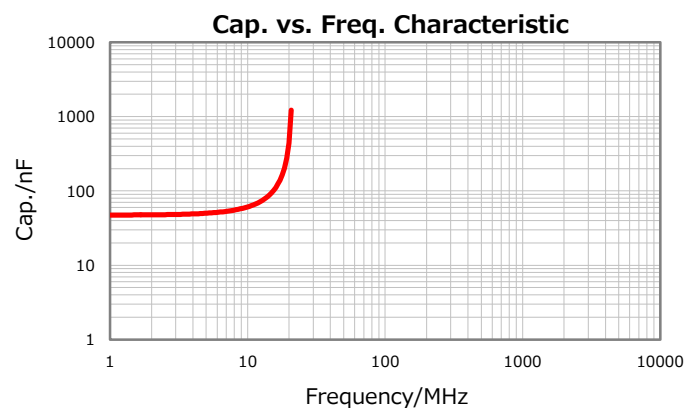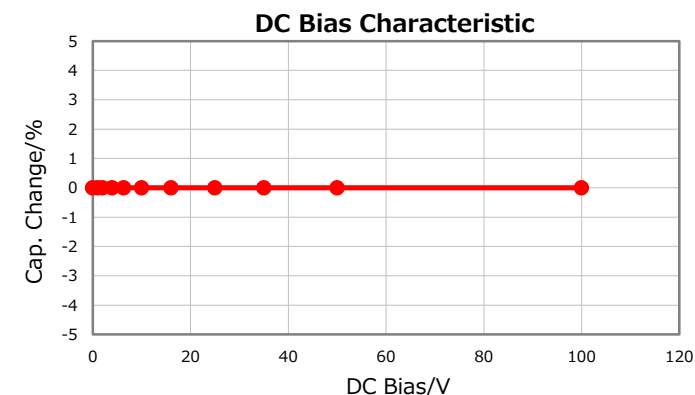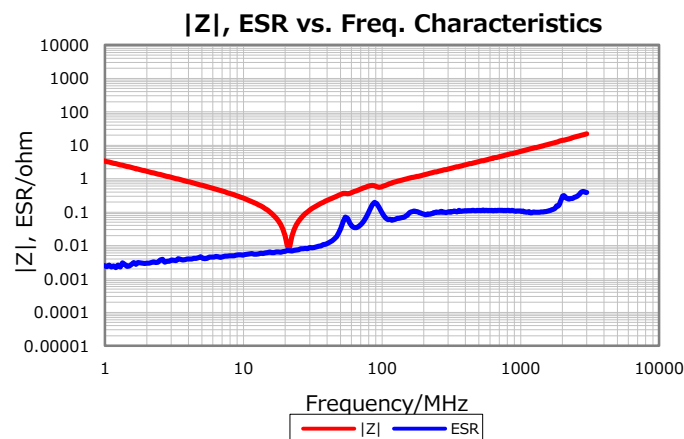

All specifications are subject to change without notice.

July 6, 2016