

C3225X6S1H475M250AB

TDK Item Description : C3225X6S1H475MT****



Application & Main Feature

Commercial Grade (General (Up to 50V))

Series

C3225 [EIA 1210]

Dimensions

L	3.20mm +/-0.4mm
W	2.50mm +/-0.3mm
T	2.50mm +/-0.3mm
B	0.20mm Min.
G	

Temperature Characteristic

X6S (-55 to 105 degC +/-22%)

Rated Voltage

1H (50Vdc)

Capacitance

4.7uF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor


5% Max.

Insulation Resistance


106Mohm Min.

AEC-Q200


Not Applicable




DC Bias Characteristic

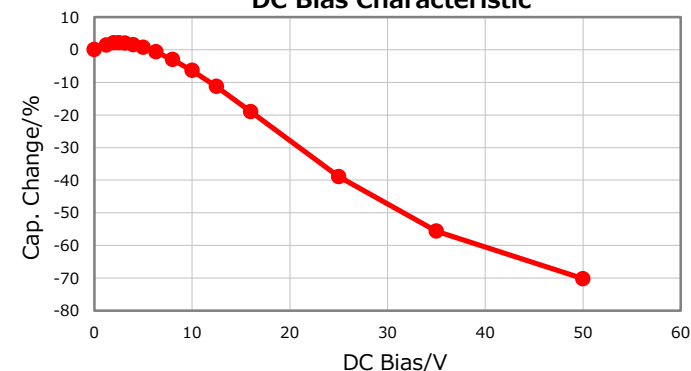


|Z|, ESR vs. Freq. Characteristics

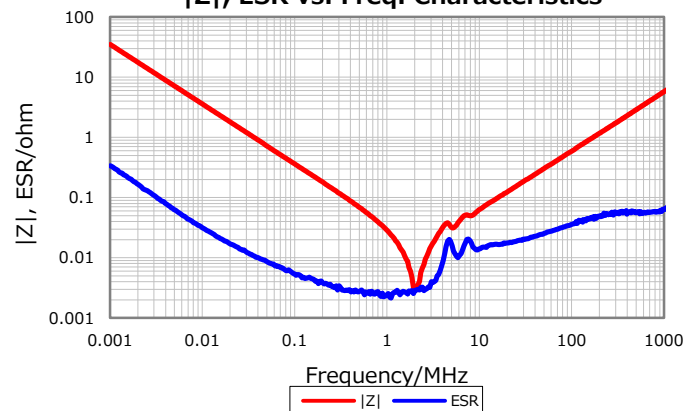


Temperature Characteristics

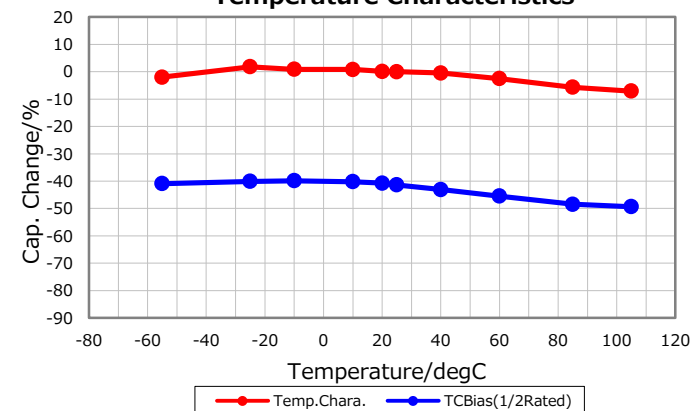

Cap. vs. Freq. Characteristic

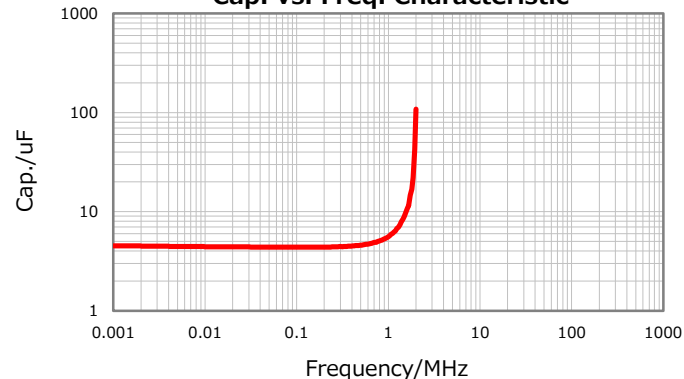

Ripple Temperature Rise Characteristics

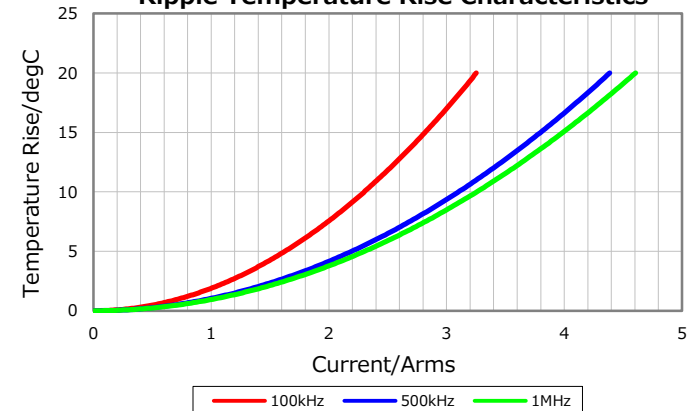

All specifications are subject to change without notice.

June 29, 2017