

CGA5L3X8R2A334M160AE

TDK Item Description : CGA5L3X8R2A334MT***S




Equivalent C3216X8R2A334M for Automotive

Application & Main Feature

Automotive Grade (Soft Termination)

Series

CGA5(3216) [EIA CC1206]



Dimensions

L	3.20mm +0.4,-0.2mm
W	1.60mm +0.3,-0.2mm
T	1.60mm +0.3,-0.2mm
B	0.20mm Min.
G	1.00mm Min.

Temperature Characteristic

X8R (-55 to 150 degC +/-15%)

Rated Voltage

2A (100Vdc)

Capacitance

330nF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor






3% Max.

Insulation Resistance

1.515Gohm Min

AEC-Q200

Yes

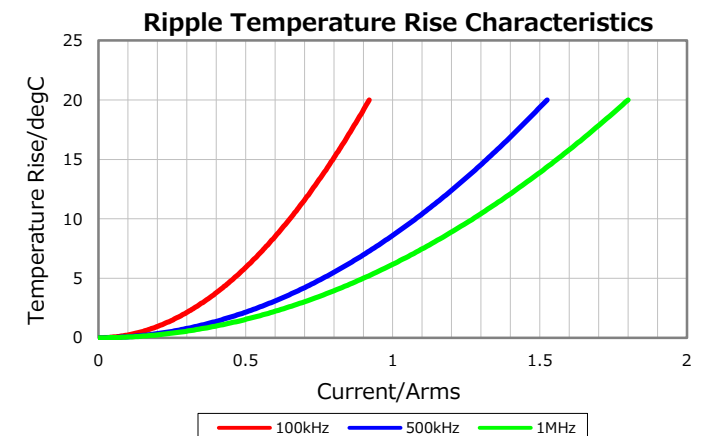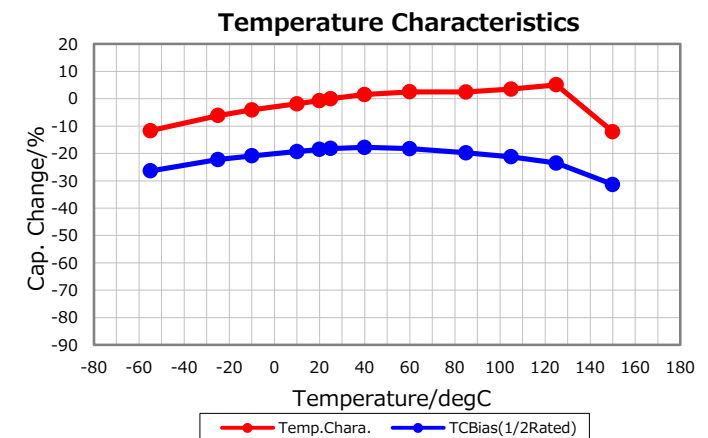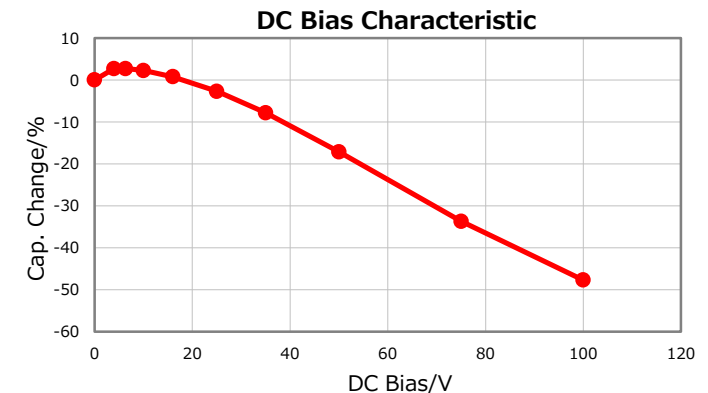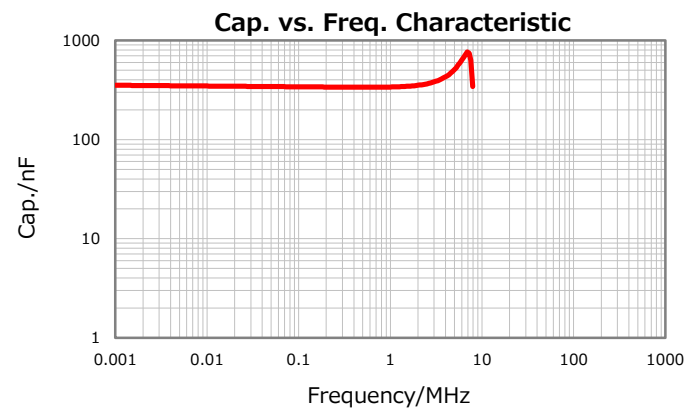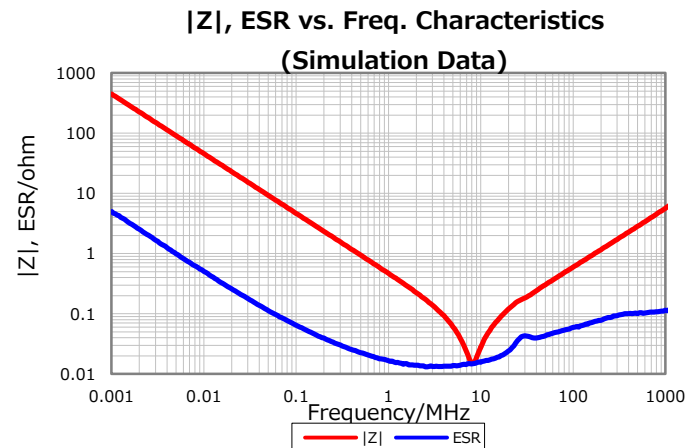

All specifications are subject to change without notice.

March 17, 2017