

C1608X8R1E334M080AE

TDK Item Description : C1608X8R1E334MT***S



Application & Main Feature

Commercial Grade (Soft Termination)

Series

C1608 [EIA 0603]

Dimensions

L	1.60mm +0.2,-0.1mm
W	0.80mm +0.15,-0.1mm
T	0.80mm +0.15,-0.1mm
B	0.20mm Min.
G	0.30mm Min.

Temperature Characteristic

X8R (-55 to 150 degC $\pm 15\%$)

Rated Voltage

1E (25Vdc)

Capacitance

330nF

Capacitance Tolerance

M ($\pm 20\%$)

Dissipation Factor


5% Max.

Insulation Resistance


1.515Gohm Min

AEC-Q200


Not Applicable




DC Bias Characteristic

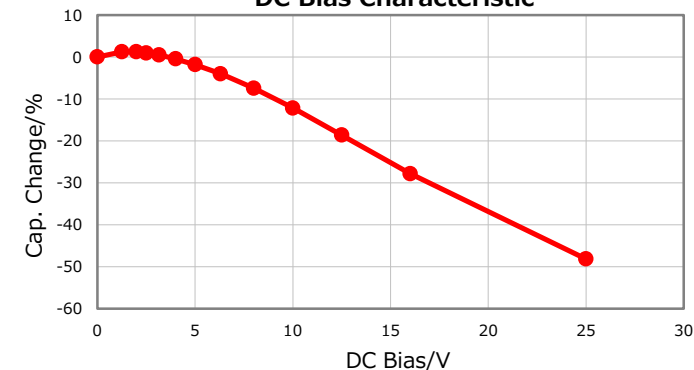


|Z|, ESR vs. Freq. Characteristics (Simulation Data)

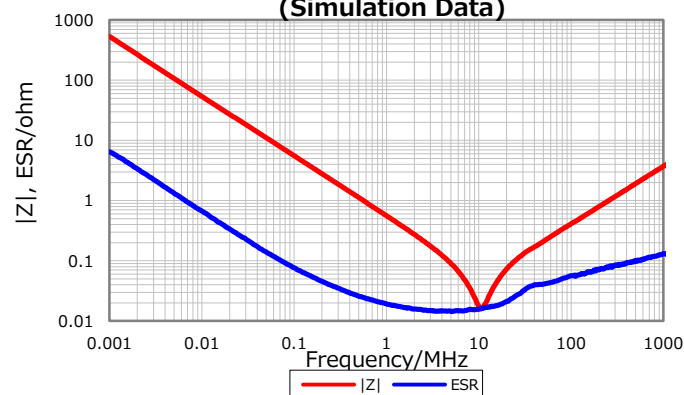


Temperature Characteristics

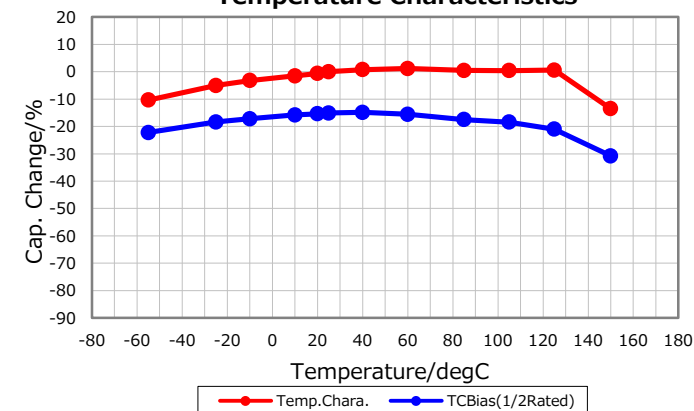

Cap. vs. Freq. Characteristic

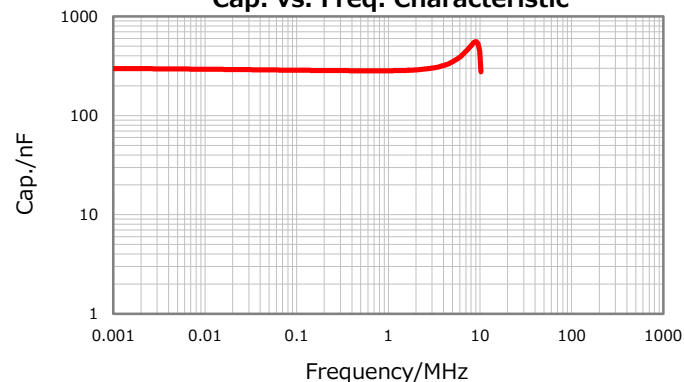

Ripple Temperature Rise Characteristics

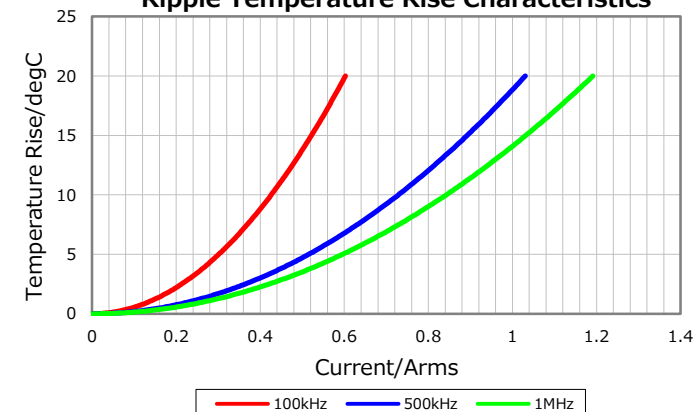

All specifications are subject to change without notice.

July 24, 2018